


- NOTES:-
1. FUSE 1.5A PER SELECTOR
 2. CUT STRAP U26-U28 FOR CALLING PAR RELEASE
 3. WHEN INT. RINGING EARTH IS EMPLOYED DISCONNECT STRAPS U23-U25 & U27-U29. STRAP U23-U29 & U25-U27.
 4. ALL WIRING TO BE 25 SWG UNLESS OTHERWISE SPECIFIED.
 5. Ø FOR WIRING SEE RELEVANT RACK COMMON SERVICES DIAGRAM

BATT BK 22 SWG FUSE **1B2** U12

ETH R 22 SWG ETH BAR **1A2** U11

BATT W U12-D2-REb-R2b-R3b-Ae-VM2-RMe

ETH R U11-F8-DA-B23-Ba-BB-RAa-Ab-A1-E25-H1-R1a

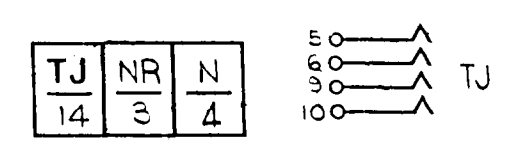

				FINAL SELECTOR (REGULAR) 100 LINE FOR P.A.B X No. 3	
AMENDMENT PARTICULARS		ISSUE DATE	APPR	REF. S 333	50 V W
J.F.O APPROVED AS STANDARD		16.11.66		81532	
P.T. L.H. Boston	22	DRAWN F.P.	CHECKED	WIRING	CIRCUIT R.E.D.
				SAW	