


TELEPHONE No.8755
WALL MOUNTED PUSH-BUTTON TELEPHONE WITH 10 PPS
SIGNALLING AND PROVISION FOR 1-2 PRESS-BUTTONS

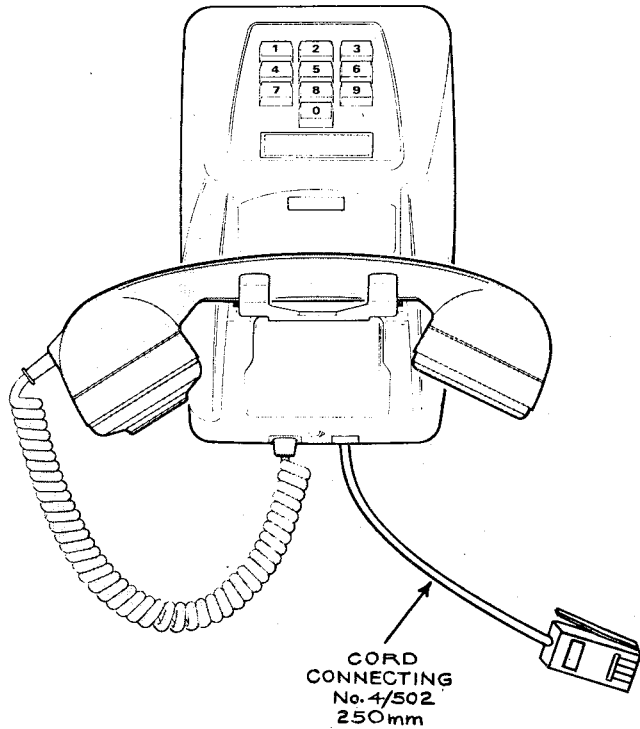

REFERENCE :-

PRIMARY SURGE PROTECTION. TI C3 F0052

NOTES :-

- 1 TELEPHONE No.8755 IS A 10 BUTTON 10PPS WALL MOUNTED PUSH-BUTTON TELEPHONE INTENDED FOR USE IN PLACE OF TELEPHONE No.8741. IT DOES NOT REQUIRE A BATTERY OR EXTERNAL POWER UNIT.
- 2 THE TELEPHONE IS FITTED WITH A HIGH IMPEDANCE BELL AND IS INTENDED FOR PARALLEL WORKING USING LINE JACK UNIT. . . , OR JACK No.620 SERIES.
- 3 LINE JACK UNIT. . . /1A, 2A OR 3A SHOULD BE USED AS APPROPRIATE. FOR PBX EXTERNAL EXTENSIONS A LINE JACK. . . /1A SHOULD BE USED IF PRIMARY SURGE PROTECTION IS REQUIRED AS DEFINED IN TI C3 F0052 SECTION 4.
- 4 TELEPHONE No.8755 CANNOT BE USED FOR CONTROL OF SUBSCRIBERS GROUP TRANSFER, EXCEPT FOR TXE2 AND TXK3 EXCHANGES WHERE NO TRANSFER EQUIPMENT IS REQUIRED AT THE CUSTOMERS PREMISES.
- 5 TELEPHONE No.8755 CANNOT BE USED AS THE CARRIER SUBSCRIBER ON THE WB900 "1+1" SUBSCRIBERS CARRIER SYSTEM.
- 6 ON SOME REFURBISHED PRESS-BUTTON TELEPHONES TERMINALS 16, 17 AND 18 DO NOT EXIST. THEY HAVE BEEN REDESIGNATED AS TERMINALS 2A, 19B AND 19A RESPECTIVELY. THE BELL WILL BE CONNECTED BETWEEN TERMINALS T4 AND T19, NOT BETWEEN TERMINALS T4 AND T16 AS SHOWN. THE WHITE CONDUCTOR OF THE CORD CONNECTING No.4/502 WILL BE CONNECTED TO T19 AND NOT T18 AS SHOWN.

© BRITISH TELECOMMUNICATIONS 1981

BRITISH TELECOMMS HQRS			
PAPER:- W	ISSUE		
DISTRIBUTION:- GENERAL		PD 1-1-1	3-12-81

66 *EF* *Colin Dobson*

FIG.2 CONNEXIONS AS ISSUED

