
TELEPHONE No. 8766 PRESS-BUTTON TRIMPHONE WITH 10 PPS SIGNALLING AND PROVISION FOR ONE PRESS-BUTTON

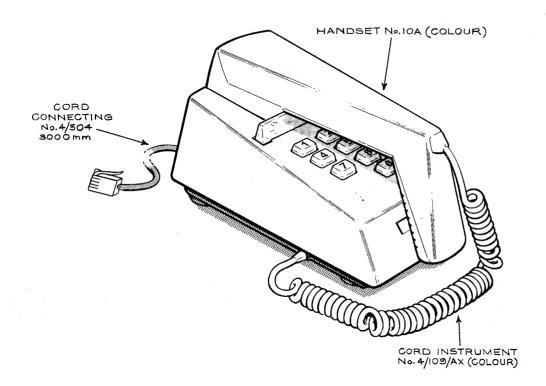

REFERENCES:— PRIMARY SURGE PROTECTION.....TI C3 F0052

BRITISH TELECOMMUNICATIONS 1981 BRITISH TELECOMMS HORS PAPER:-W DISTRIBUTION:GENERAL ME/PDI-1-1 2-11-81

NOTES:-

- I TELEPHONE No. 8766 IS A 10 BUTTON 10 PPS SIGNALLING PRESS-BUTTON TRIMPHONE INTENDED FOR USE IN PLACE OF TELEPHONE No. 8722G. IT DOES NOT REQUIRE A BATTERY OR EXTERNAL POWER UNIT.
- 2 THE TELEPHONE No.8766 IS FITTED WITH A RESISTOR IN SERIES WITH THE TONE CALLER AND IS INTENDED FOR PARALLEL WORKING USING LINE JACK UNIT..., OR JACK No. 620 SERIES.
- 3 LINE JACK UNIT/IA, ZA OR 3A SHOULD BE USED AS APPROPRIATE. FOR PBX EXTERNAL EXTENSIONS A LINE JACK UNIT/IA SHOULD BE USED IF PRIMARY SURGE PROTECTION IS REQUIRED AS DEFINED IN TICS FOOS2 SECTION 4.
- 4 THE TELEPHONE No.8766 CANNOT BE USED FOR THE CONTROL OF SUBSCRIBERS GROUP TRANSFER, EXCEPT FOR TXEZ AND TXK,3 EXCHANGES WHERE NO TRANSFER EQUIPMENT IS REQUIRED AT THE CUSTOMERS PREMISES.
- 5 IN SOME VERSIONS REG (REGULATOR No. 7A), MAY BE ATTACHED TO THE PRESS-BUTTON UNIT ASSEMBLY.
- G THE TELEPHONE No.8766 CANNOT BE USED AS THE CARRIER SUBSCRIBER ON THE WB900 '1+1' SUBSCRIBER CARRIER SYSTEM.
- 7 WHEN REPLACING THE COVER SPECIAL CARE IS NEEDED TO ENSURE THE WIRES TO THE PRESS-BUTTON UNIT DO NOT FOUL THE GRAVITY SWITCH MECHANISM.
- 8 ON SOME REFURBISHED PRESS-BUTTON TELEPHONES TERMINALS 16,17 AND 18 DO NOT EXIST. THEY HAVE BEEN REDESIGNATED AS TERMINALS 2A,19B AND 19A RESPECTIVELY. THE BELL WILL BE CONNECTED BETWEEN TERMINALS TA AND TIS, NOT BETWEEN TERMINALS TA AND TIS, NOT BETWEEN TERMINALS TA AND TIS, NOT BETWEEN TERMINALS TO CONNECTING No.4/504 WILL BE CONNECTED TO TIS AND NOT TIS AS SHOWN.

