


# TELEPHONE No.8756

## PRESS-BUTTON TELEPHONE WITH 10 PPS SIGNALLING AND PROVISION FOR ONE-TWO PRESS-BUTTONS

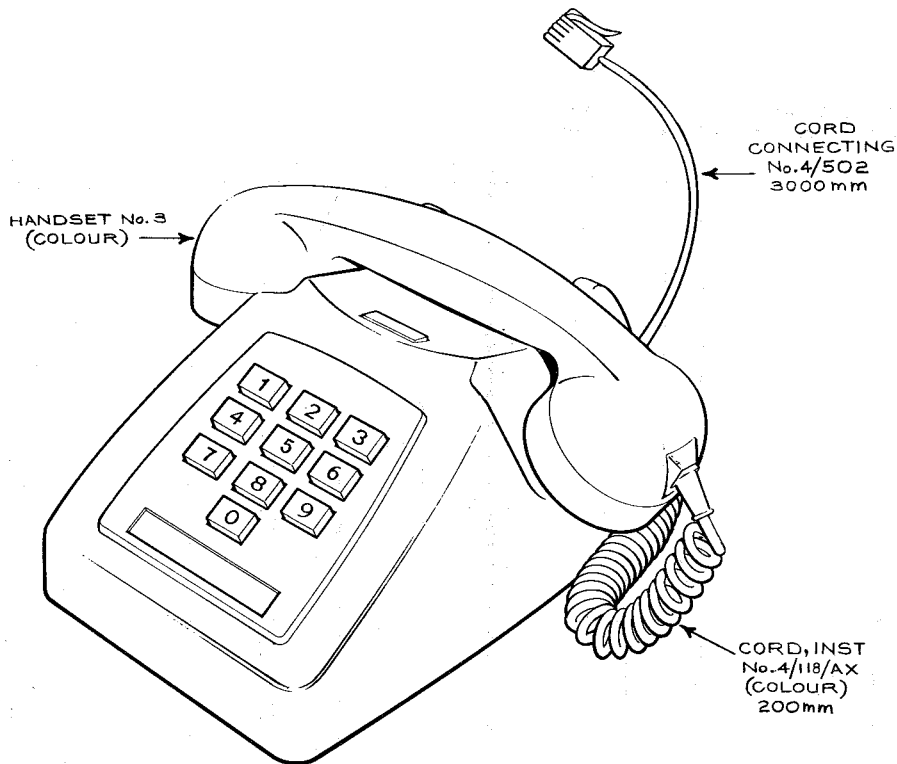

**NOTES:—**

- 1 TELEPHONE No.8756 IS A 10PPS SIGNALLING PRESS-BUTTON TELEPHONE INTENDED FOR USE IN PLACE OF TELEPHONE No.8746. . . . IT DOES NOT REQUIRE A BATTERY OR EXTERNAL POWER UNIT.
- 2 THE TELEPHONE No.8756 IS FITTED WITH A HIGH IMPEDANCE BELL AND IS INTENDED FOR PARALLEL WORKING USING LINE JACK UNIT. . . ., OR JACK No.620 SERIES.
- 3 LINE JACK UNIT. . . ./1A, 2A OR 3A SHOULD BE USED AS APPROPRIATE. FOR PBX EXTERNAL EXTENSIONS A LINE JACK. . . ./1A SHOULD BE USED IF PRIMARY SURGE PROTECTION IS REQUIRED AS DEFINED IN T1 C3F0052 SECTION 4.
- 4 THE TELEPHONE No.8756 CANNOT BE USED FOR THE CONTROL OF SUBSCRIBERS GROUP TRANSFER, EXCEPT FOR TXE2 AND TXK3 EXCHANGES WHERE NO TRANSFER EQUIPMENT AT THE CUSTOMERS PREMISES IS REQUIRED.
- 5 THE TELEPHONE No.8756 CANNOT BE USED AS THE CARRIER SUBSCRIBER ON THE WB 900 '1+1' SUBSCRIBER CARRIER SYSTEM.
- 6 ON SOME REFURBISHED PRESS-BUTTON TELEPHONES TERMINALS 10, 17 AND 18 DO NOT EXIST. THEY HAVE BEEN REDESIGNATED AS TERMINALS 2A, 10B AND 19A RESPECTIVELY. THE BELL WILL BE CONNECTED BETWEEN TERMINALS T4 AND T19, NOT BETWEEN TERMINALS T4 AND T16 AS SHOWN. THE WHITE CONDUCTOR OF THE CORD CONNECTING No.4/502 WILL BE CONNECTED TO T10 AND NOT T18 AS SHOWN.

**REFERENCES:—**

PRIMARY SURGE PROTECTION. . . . . T1 C3 F0052

© BRITISH TELECOMMUNICATIONS 1981

BRITISH TELECOMMS HQRS	ISSUE		
PAPER:—W			
DISTRIBUTION:— GENERAL		ME/PD 1.1.1	2-11-81

FIG.1 CONNEXIONS AS ISSUED

