

# The "fast one" of the con-family.

contast-push-button dialling (IWV and MFC)



attractive

modern

advanced design

**Shipton Communications Limited**  
Shipton House  
Frogmore Road  
Hemel Hempstead  
Hertfordshire HP3 9TG  
Tel: (0442) 47171 Telex: 825492




**General specifications:**  
 Dimensions/weight – packed  
 Height: 100 mm  
 Width: 305 mm  
 Depth: 230 mm  
 Weight: approx. 2 kg

**The contast TWB operates fast**

A fast and reliable push-button operation reduces lengthy dialling and the number of misrouted connections. You can save time with each telephone call you make.

When dialling a six-digit telephone number with a conventional rotary dial, you will require about 8 to 10 sec. But with push-button dialling you will only need 4 to 6 sec.

Less misrouted connections, for the contast TWB



prevents the most frequent mistakes resulting from rotating the disc too fast, failing to reach the stop or having the set in an improper position. The push-buttons are always clearly in view, even when you are standing behind the set. The desired push-button is only touched. All is done in one phase of motion instead of three as it used to be with the rotary dial.

**The ingenious supplement for your system**

The contast TWB (IWV) can easily be connected to the various sizes of PABXs operating with rotary dial telephones.

The contast TWB (MFC) can only be connected to PABXs with tone dialling facility.

**Advanced technology, attractive design**


The contast TWB is housed in an attractive flat casing. (H x W x D/85 x 225 x 181 mm) and the handset is light and easy to be held in the hand.

The contast TWB with its sophisticated solid-state technology facilitates servicing and operates with DeTeWe reliability.


By the way, the contast TWB is available in green and orange.

**contast TWB with additional loudspeaker unit. For a high degree of convenience.**


An additional loudspeaker unit can be connected to the contast TWB to make telephoning even more convenient. You actuate a push-button and persons present can listen to your telephone conversation. **contast TWB/R (IWV) with re-dial facility of the last telephone number.**

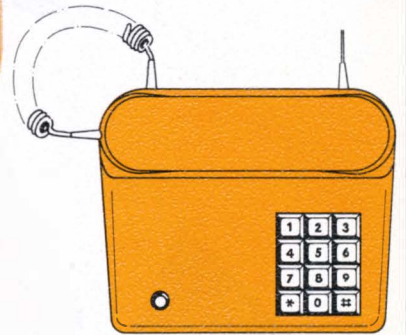

Width: 225 mm

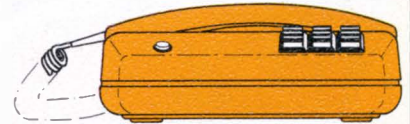

Height: 85 mm

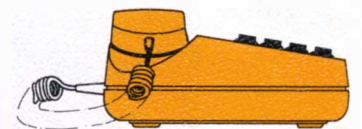

Depth: 181 mm



**Technical data**

**MFC – multi-frequency code dialling**  
 Frequencies according to Q23 of the CCITT  
 Frequency deviation: ± 1.8%  
 Transmission level: – 4 dBm ± 2.5 dB

**IWV – impulse dialling**  
 Impulse/pause: 1:1.6 (10 ± 0.5 pps)  
 Inter-digital time: 800 msec. + 150 msec.

**Common data**  
 Impedance (300-3400 Hz): 450 ± 100 Ohms  
 Loop current: min. 17 mA  
 Weight, set: 1 kg  
 Weight, handset: 220 g  
 Connecting cord, length: 2 m  
 Casing – ABS: impact-resistant/anti-static