


**P. B.X. POWER LEADS**  
**MAXIMUM PERMISSIBLE RESISTANCE**  
**VOLTAGES :- 22, 30, 50 & 60V**


**N630**  
**PAGE 1-2**  
**ISSUE B**

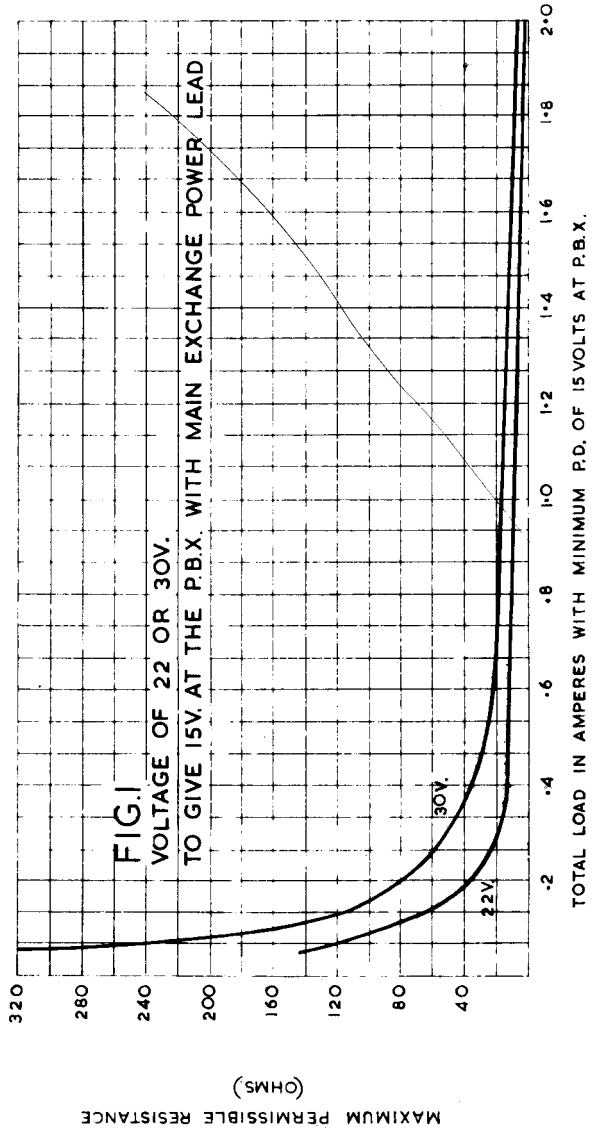

P.O.E.D  
 S' BCH.

PAPER:- W  
 CIRCULATION  
 GENERAL

ISSUES		
B	NEW FORMAT. <i>H.M.O.</i>	6-6-66
A	REDRAWN <i>V.B.C.</i>	23-10-62
	J. H. COMBRIDGE 53	7-2-50

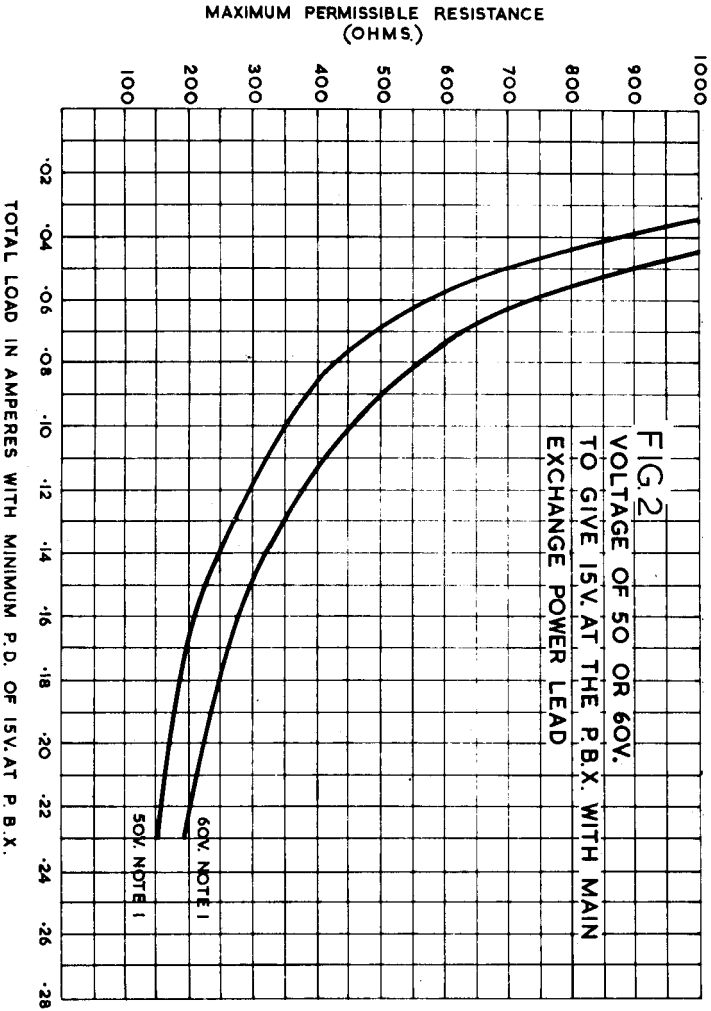

NOTE 1. THESE VOLTAGES MUST NOT BE USED FOR DIRECT POWER LEADS WHERE THE BUNCHED LINE RESISTANCE IS BELOW 150 OHMS (50V) OR 200 OHMS (60V) SEE E.I. POWER GENERAL STIO.