


POWER-UNITS No.53A AND No.53B
 10V 0.25A DC
 SUPPLY FROM 50Hz AC MAINS

N 631
 ISSUE E

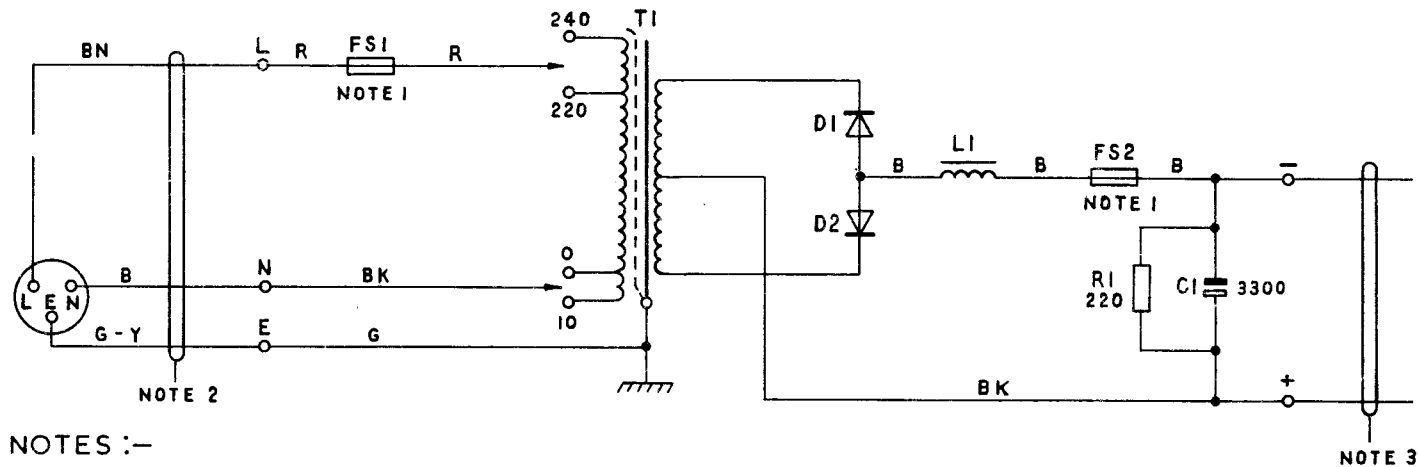


NOTES :-

1. FS1 - FUSE No.36A/0.1 FS2 - FUSE No.36/0.5
2. CORD FLEXIBLE 3183Y 0.75mm² AND BS 3 PIN PLUG TO SUIT SOCKET TO BE REQUISITIONED SEPARATELY AND FITTED LOCALLY FUSED PLUGS TO BE FITTED WITH 3 AMP FUSES
3. CABLE DISTRIBUTION 3595 REQUISITIONED SEPARATELY AND FITTED LOCALLY
4. THE OUTPUT MUST NOT BE EARTHED

PO TELECOMMS HQRS PAPER :-W DISTN :- GENERAL	E	NEW FORMAT. TRANSFORMER 200V TAPPING REMOVED WIRE COLOURS AND CAPACITOR VALUE CHANGED. NOTES 2&3 AMENDED. NOTE 4 ADDED. 53B INTRODUCED D.L.W. TD 7.2.3	12.4.77
	D	NEW FORMAT KMA	12.7.66

POWER-UNITS No.53A AND No.53B
 10V 0.25A DC
 SUPPLY FROM 50Hz AC MAINS

N 631
 ISSUE F

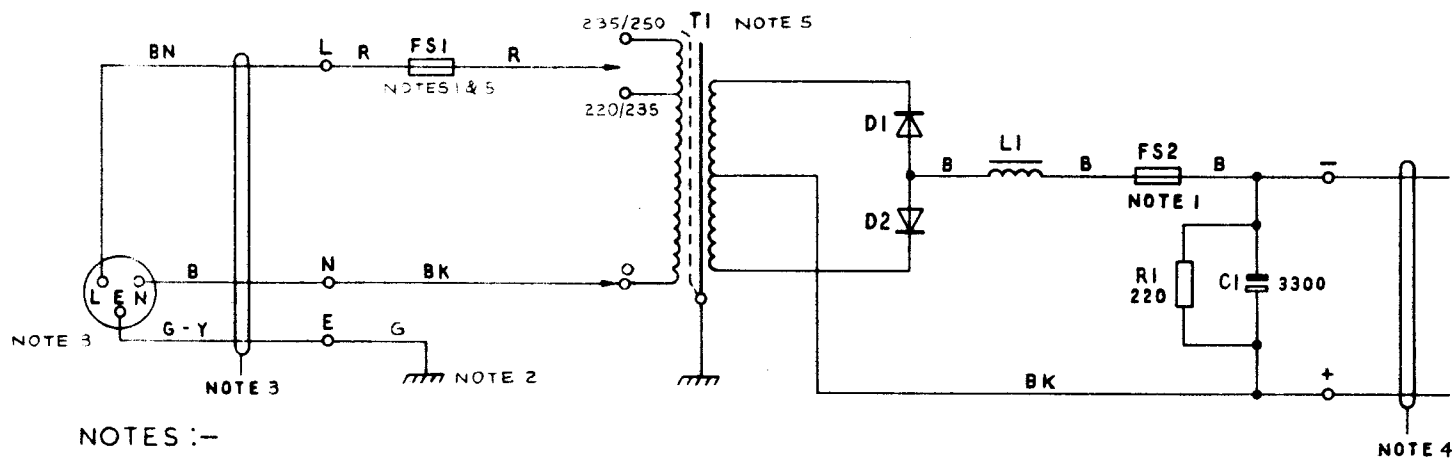

NOTES :-

1. FS1 - FUSE No.80A/0.1 FS2 - FUSE No.36/0.5.
2. THE MAINS PROTECTIVE EARTH MUST BE CONNECTED TO THE EARTH CONNECTING BLOCK OF THE POWER-UNIT. THE OUTPUT MUST NOT BE EARTHED.
3. CORD FLEXIBLE 3183Y 0.75mm² AND PLUG No.103 TO BE REQUISITIONED SEPARATELY AND FITTED LOCALLY. PLUGS TO BE FITTED WITH 3 AMP FUSES.
4. CABLE DISTRIBUTION 3595 REQUISITIONED SEPARATELY AND FITTED LOCALLY.
5. EARLIER VERSIONS OF THE POWER-UNIT MANUFACTURED BEFORE 1983 SHOW DIFFERENT PRIMARY TAPPINGS ON T1. FUSE No.80A/... (FS1) WAS FUSE No.36A/...

BRITISH TELECOMMS HQRS PAPER :- W DISTN :- GENERAL	W C O D E	F	NOTE 5 ADDED. NOTES 1, 2 & 3 AMENDED. RAS	19-12-83
		E	NEW FORMAT. TRANSFORMER 200V TAPPING REMOVED. WIRE COLOURS AND CAPACITOR VALUE CHANGED. NOTES 2 & 3 AMENDED. NOTE 4 ADDED. 53B INTRODUCED. DLW TD 7.2.3	12-4-77
		D	NEW FORMAT KMA	12-7-66