

CIRCULATION.
 CBS. Nos. 2 & 3
 AND MAGNETO.


CALL OFFICE CIRCUIT - C.B.S. Nos. 2&3 SYSTEMS.
 PUBLIC CALL OFFICE, PLAN No.5A (USING BOX C.C.No.16 COMPLETE) ALSO
 SUBSCRIBERS D.E.L. WITH COIN-BOX AND P.M.B.X. EXTENSION WITH COIN-BOX
 WORKING TO CORDLESS TYPE SWBD. (USING BOX C.C.No.16A COMPLETE).

N. 2400^B 31-8-36.
 SUPERSEDED BY N. 2409
 FOR NEW WORK ON PUBLIC
 CALL OFFICES.
 STANDARD FOR SUBS. D.E.L.
 ALSO P.M.B.X. EXTNS. WORKING
 TO CORDLESS SWBD. (BOTH
 WITH COIN-BOX).
 SUPERSEDES N1113 FOR NEW
 WORK.

POST PAYMENT WORKING.
 BOX, C.C. No. 16 COMPLETE, OR
 BOX, C.C. No. 16 A COMPLETE.


TELE. No. 196.
 MINUS CORD.

3-2-37 B
 31-8-36 A
 Title and Super-session notes amended.
 Redrawn & super-session note
 added, & Dusi/M/ CBS. 1077 deleted.
 Amendment.

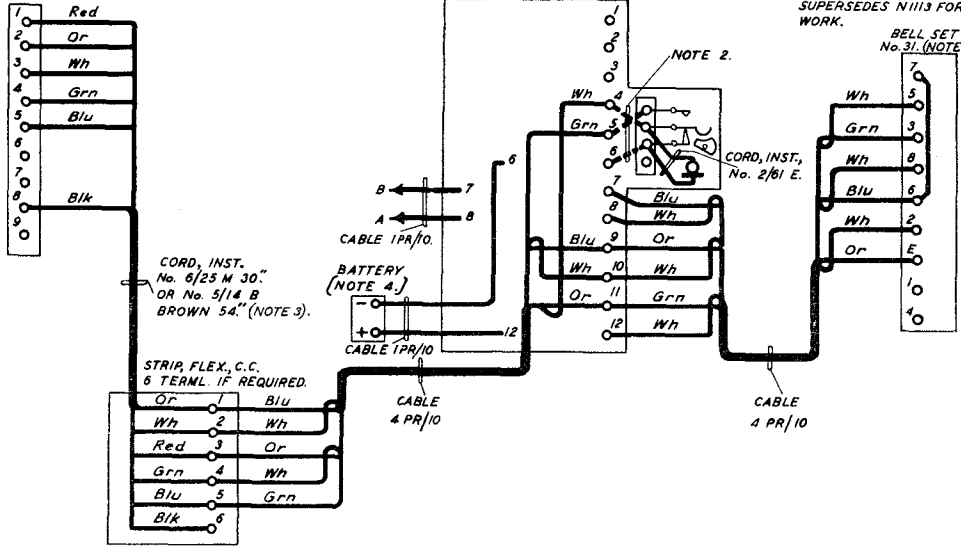

W

EXPLANATORY DIAGRAM FOR C.B.S. Nos. 2 & 3 SYSTEMS.

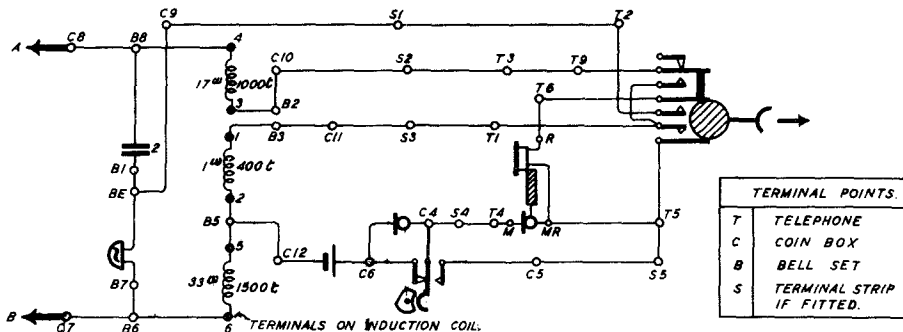

NOTES:-

- REMOVE STRAP AND CONNECT EXTENSION BELL BETWEEN TERMINALS Nos. 6 & 7 ON "BELL SET No. 31" WHEN REQUIRED.
- THE CONNEXIONS BETWEEN THE STRIP CONNEXION IN "BOX, CASH No. 12 OR No. 13" AND THE SPRING ASSEMBLY ON THE "BOX, COIN COLLECTING No. 16" SHOULD BE MADE LOCALLY.
- WHEN THE EQUIPMENT IS FITTED IN A KIOSK OR CABINET "CORD, INST. No. 6/25 M. 30" SHOULD BE USED. THE CORD SHOULD BE PASSED THROUGH A HOLE IN THE WALLBOARD IMMEDIATELY BEHIND THE "TELE. No. 198 MINUS CORD" AND TERMINATED DIRECT ON THE CONNEXION STRIP IN THE "BOX, CASH No. 12 OR No. 13" WHEN THE "TELE. No. 198 MINUS CORD" IS REQUIRED TO STAND ON A DESK OR TABLE (IN SUBSCRIBERS PREMISES) A "CORD, INST. No. 5/14 B. BROWN 54" SHOULD BE USED AND A "STRIP, FLEX., CORD CONN. 6 TERMINAL" FITTED IF NECESSARY.
- PROVIDE ACCORDING TO TRANSMISSION REQUIREMENTS:- (a) FOR PUBLIC CALL OFFICE CIRCUITS - CELLS LECLANCHE DR2 (2 OR 3) AND HOUSE IN BOX BATTERY LECLANCHE WK2. 2 CELL C.O. (b) FOR SUBSCRIBERS DIRECT EXCHANGE LINE - 2 OR 3 CELLS LECLANCHE WK4, WK2, OR WK1.
- A "BACKBOARD FOR BOX, COIN COLLECTING No. 16A" WILL BE REQUIRED WITH "BOX, COIN COLLECTING No. 16A COMPLETE" WHEN THE LATTER IS FITTED TO A DESK OR TABLE.
- THE MECHANICAL FEATURES OF THE "BOX, COIN COLLECTING No. 16" ARE SHOWN IN DIAGRAM N. 1104.
- THIS DIAGRAM WILL CONTINUE TO BE USED FOR (a) THE PROVISION OF SUBSCRIBERS D.E.L.'s. ALSO P.M.B.X. EXTENSIONS WORKING TO CORDLESS SWITCHBOARDS (BOTH WITH COIN-BOX). AND (b) THE MAINTENANCE OF PUBLIC CALL OFFICES SO CONNECTED.