



SCHEMATIC

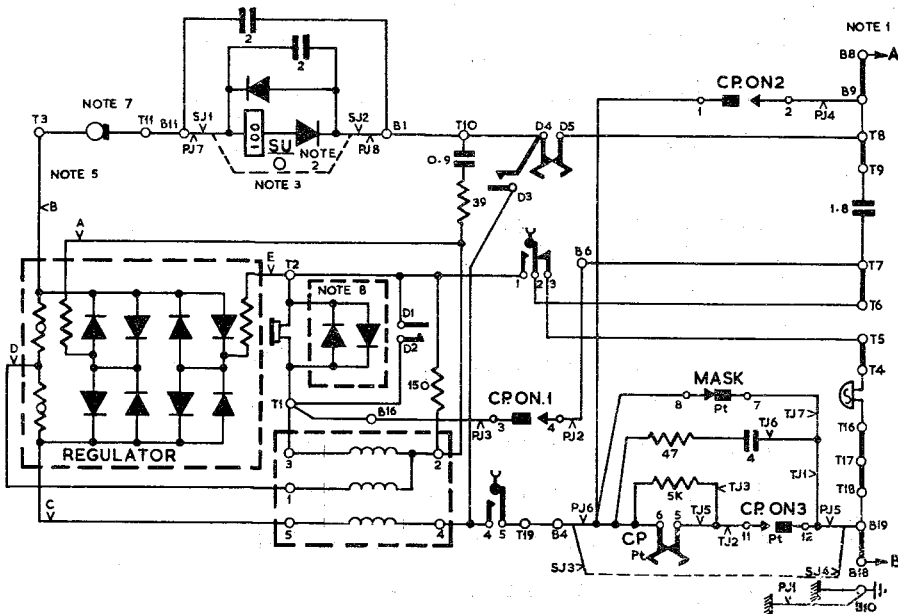

WIRING  
 TELEPHONE No. 706L OR  
 TELEPHONE No. 1/706 L  
 TELEPHONE No. 711

BOX COIN COLLECTING  
 No. 700

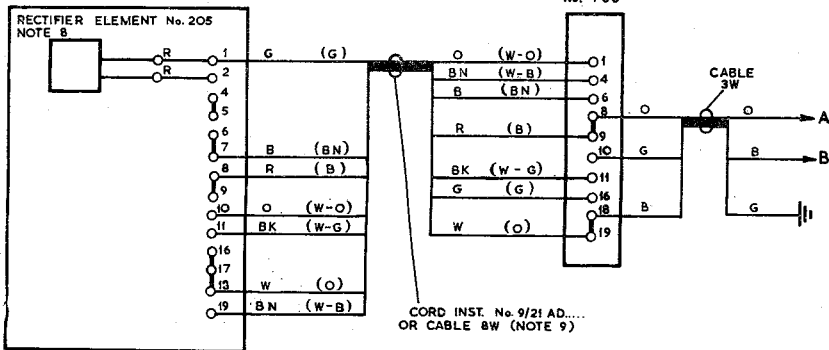

P.O.M.D.  
 M.2.2.3.

PAPER : W  
 CIRCULATION  
 GENERAL

ISSUES			
	E	NEW FORMAT <i>1/6/50</i>	5 . 4 . 68
	D	TELE. No. 711 ADDED.	15 - 12 - 63
		E.C. SEYMOUR, S1	8 - 3 - 61

N 2423

PAGE 2-2

ISSUE E.

NOTES:

1. This line +VE until called sub. answers, then -VE.
2. SU unlocks coin slots when energised by current reversal (See Note 1).
3. These points are connected by Jack 77D to provide "999" service with mechanism removed.
4. U point letter prefixes:-  
SJ - Slot unlocking Unit and Emergency Service.  
TJ - Test Jack on Pulser Unit.  
PJ - Pulser Unit.
5. When reversed in Jack Regulator connects 'B', 'C' and 'D' together, circuit then works without Regulator.
6. For wiring details of Box C.C. No.700 See N1169.
7. White wire of Handset Cord moved from T10 to T11.
8. Rectifier Element fitted to Receiver Terminals.
9. Colours in brackets refer to cable.
10. When Extension Bell required move white conductor of Cord 9/21AD from B19 to B17 and connect Bell between B17 and B18.