


AUTOMATIC SYSTEM
SHARED SERVICE (SEPARATE METERING)
PLAN 4 FACILITIES (INTERNAL ONLY) ON SUBSCRIBER'S
EXTENSION PLAN I (MAIN) (USING TELEPHONES Nos.312... & 314...)

USING JACKS No.64A

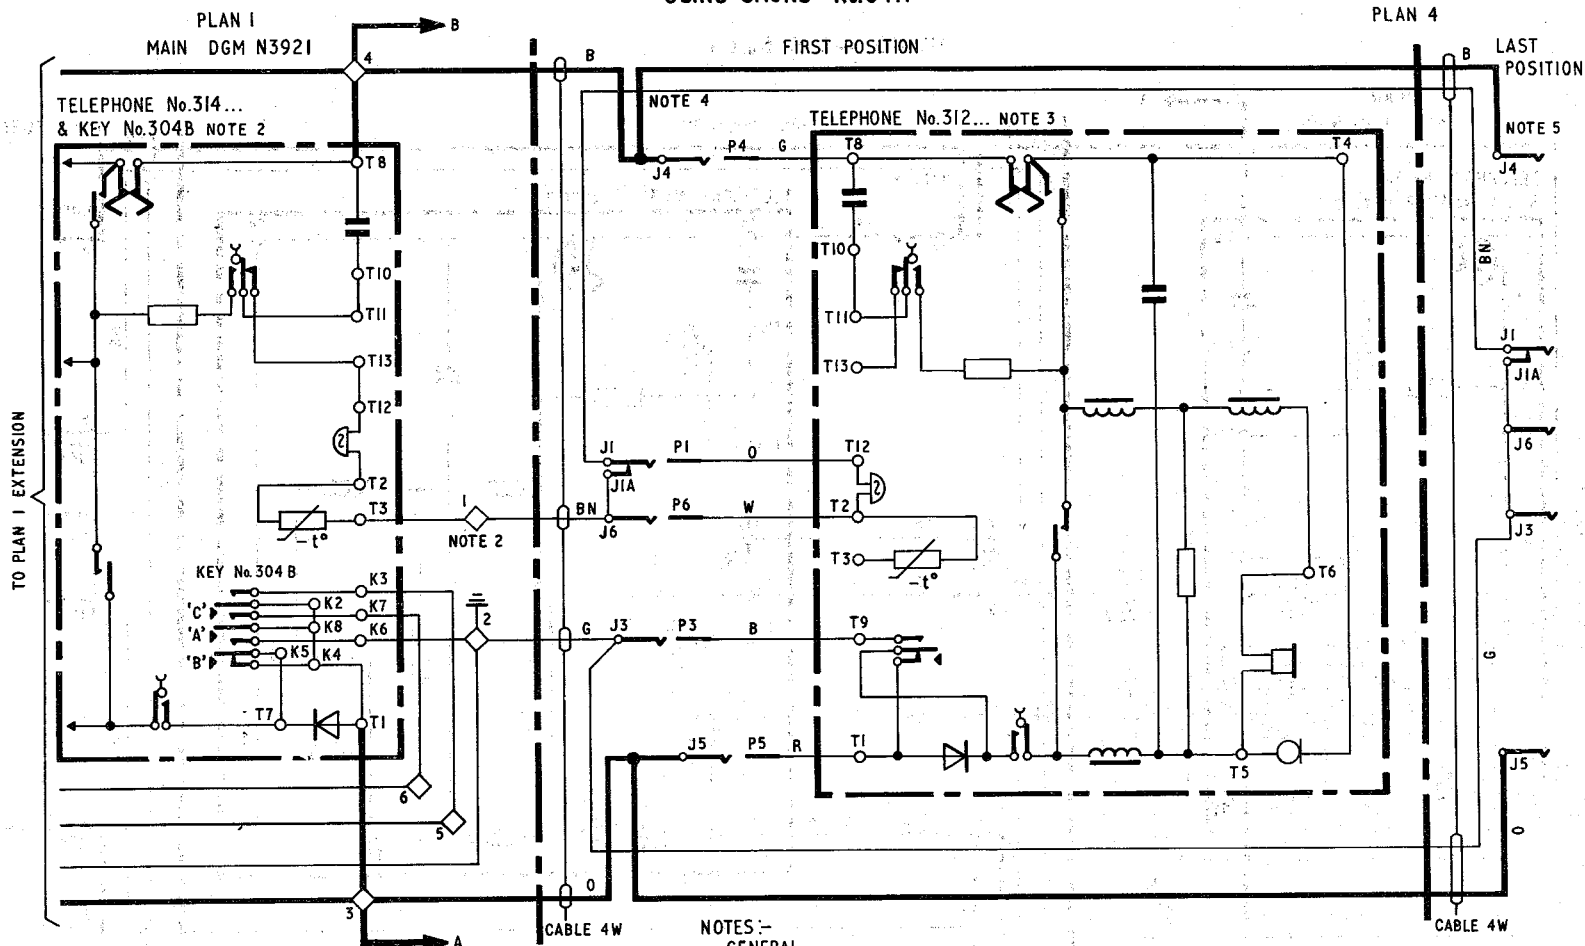

NOTES:-

GENERAL

- 1 The diagram shows an Extension Plan 4 connected to a Plan I (main)
- PLAN I MAIN**
- 2 For Plan I connexions, reference should be made to Dgm N3921 with the exception that Strap BT1-BT2 should be removed
- PLAN 4**
- 3 Remove Cord, Inst No.3/62B... and Block, Terminal No.20/4 from Telephone No.312... & fit Cord, Inst No.6/28B brown 72" and Plug No.612. Remove Straps T3-T9 and T12-T13. Fit Label No.252Q on telephone
- 4 At each Jack No.64A connect Strap JIA-J6
- 5 At last Jack No.64A connect Strap JIA-J6-J3
- 6 Cord, Inst No.6/28B... cut the spare black conductor back at both ends

P O TELECOMMS HQRS	ISSUE					
		PAPER:- Y				
		DISTN:- GENERAL				
		C	New format. Minor amendments. Pages 1 & 2 made yellow	ML	TD.2.3.1	4.5.73
		B	Title re-written, note 6 added			11.4.61
			J.H. Combridge SI/1			20.8.54

USING JACKS No.64

