

AUTOMATIC SYSTEM


N3936

SHARED SERVICE (SEPARATE METERING) SUBSCRIBERS

ISSUE A

EXTENSION PLAN 1A (INTERNAL ONLY) ON EXTERNAL

EXTENSION OF PLAN 7 OR 7A USING TELEPHONES Nos.314... & 312.

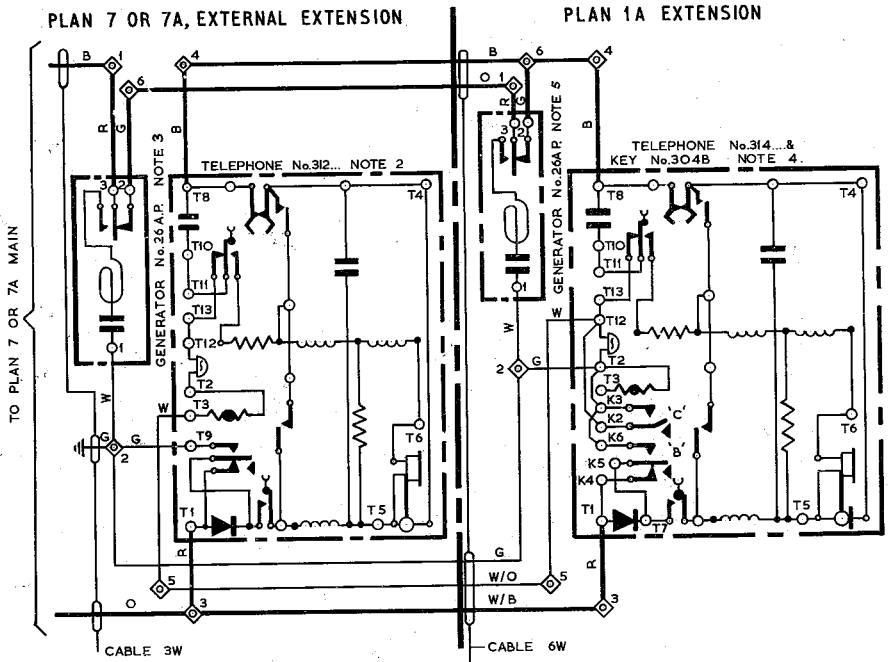

NOTES GENERAL

1. The diagram shows a plan 1A extension connected to the external extension of a plan 7 or 7A.

PLAN 7 OR 7A EXTERNAL EXTENSION

2. Remove cord, inst. No.3/62B...and block, terminal No.20/4 from telephone No.312...and fit cord, inst. No.4/57B...& block, terminal No.20/8. Remove strap T3-T9. Fit label No.252Q on telephone.
3. Fit cord, inst. No.3/62B... to generator No.26A.P.

PLAN 1A EXTENSION

4. Fit cord inst No.4/57B...to tele. No.314 and block, terminal No.20/8 add strap between BT4-BT6, fit key No.304B with 3 parts No.1/SPL/325 (plungers) in telephone. Set latch bracket control plate of key as shown on Dgm. N4301 fig.6. Disconnect strap T12-T13 and add straps — T1-K4; T7-K5; T2-K3-K6; and T12-K2. Fit label No.252W on telephone.
5. Fit cord, inst. No.3/62B...to generator No.26A.P.

Post Office Telecomms. Headquarters Mk 1. 2. 2. 3. Paper W Circulation GENERAL	ISSUES			
		A	New Format <i>Feb</i>	1. 8. 68
			J. H. Combridge. Si/1	24. 8. 54