


AUTOMATIC SYSTEM
SHARED SERVICE (SEPARATE METERING) SUBSCRIBER'S EXTENSION PLAN IA (INTERNAL ONLY)
ON INTERNAL EXTENSION OF PLAN 7 OR 7A USING TELEPHONE No. 314...

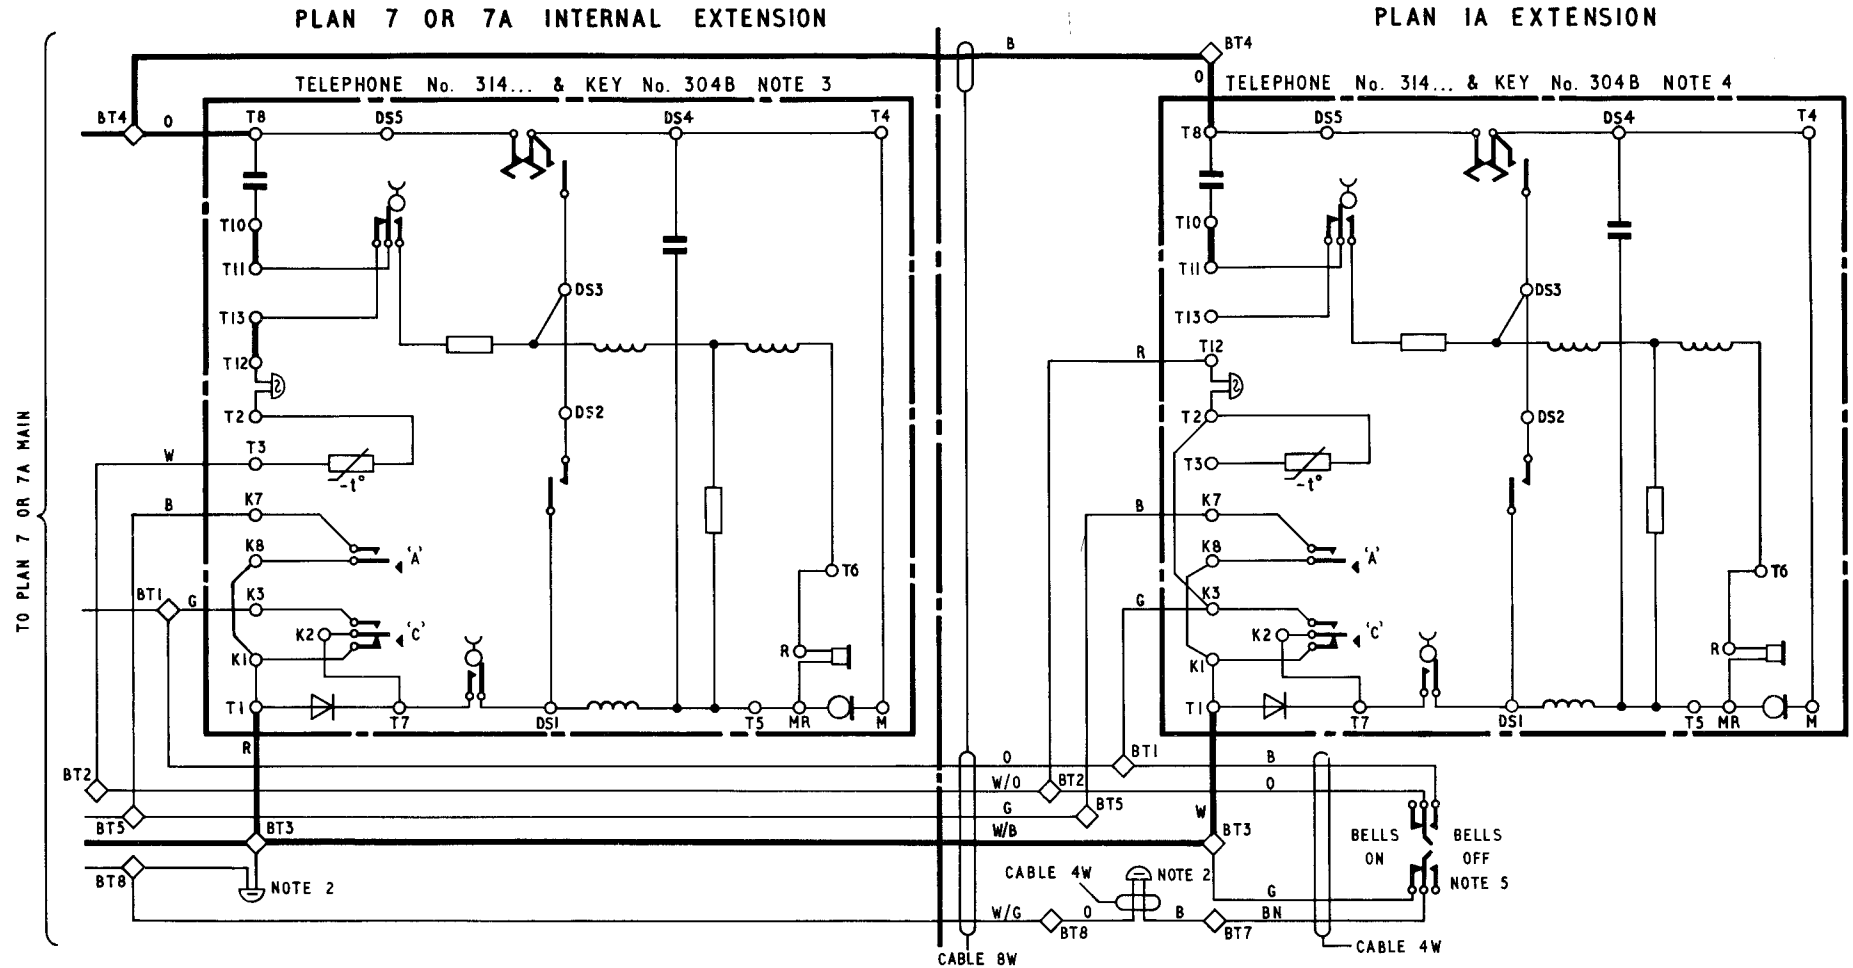

NOTES :-

GENERAL

1. The diagram shows a Plan IA Extension connected to the internal Extension of a Plan 7 or 7A.
2. Connect Bell No. 56A with coils in parallel.

PLAN 7 OR 7A INTERNAL EXTENSION

3. For Plan 7 internal Extension connexions, reference should be made to Dgm. N3928 with the exception that Strap BT1 & BT2 should be removed. Fit Label No. 252U on telephone.

PLAN IA EXTENSION

4. Fit Cord Inst. No. 5/14B... & Block Terminal No. 35A. Fit Key No. 304B with two Parts No. 1/SPL/325 (plungers) in positions A & C in Telephone No. 314... Set latch bracket control plate of key as shown on Dgm. N4301 Fig. 1. Disconnect Strap T12-T13 & add Straps T1-K1-K8; T7-K2 & T2-K3; fit Label No. 252U on telephone.
5. Where both the magneto & D.C. bells are required to be switched in or out of circuit, a Key No. 68 fitted in a Key Mounting NAA should be used. If only the magneto bell is required to be switched a Switch Tumbler No. 1M should be fitted.

P.O. TELECOMMS. HQRS.	ISSUES				
		COLOUR :- Y			
DISTN :- C.B. & AUTO		B New format. Minor amendments. Made yellow. <i>nk</i>	TD 2-3-1	16-4-74	
		A New format.		29-3-68	