


CIRCULATION  
 9.5. Nos 2 & 3  
 MAGNETO

**CALL OFFICE CIRCUIT - C.B.S. Nos. 2 & 3 SYSTEMS.**  
**SUBSCRIBER'S EXTENSION WORKING, PLAN No. 1B (INTERNAL ONLY).**  
 USING TELEPHONE No. 196 MINUS CORD. BOX, C.C. No. 16A COMPLETE & BELL SET No. 31.  
 EXPLANATORY DIAGRAM.

**N 4127**  
 5-5-36  
 3 PANELS - 1

Amendment  
 SUPERSESSION NOTE ADDED  
 ALL PANELS MADE YELLOW  
 Panels re-arranged  
 27.7.38/A

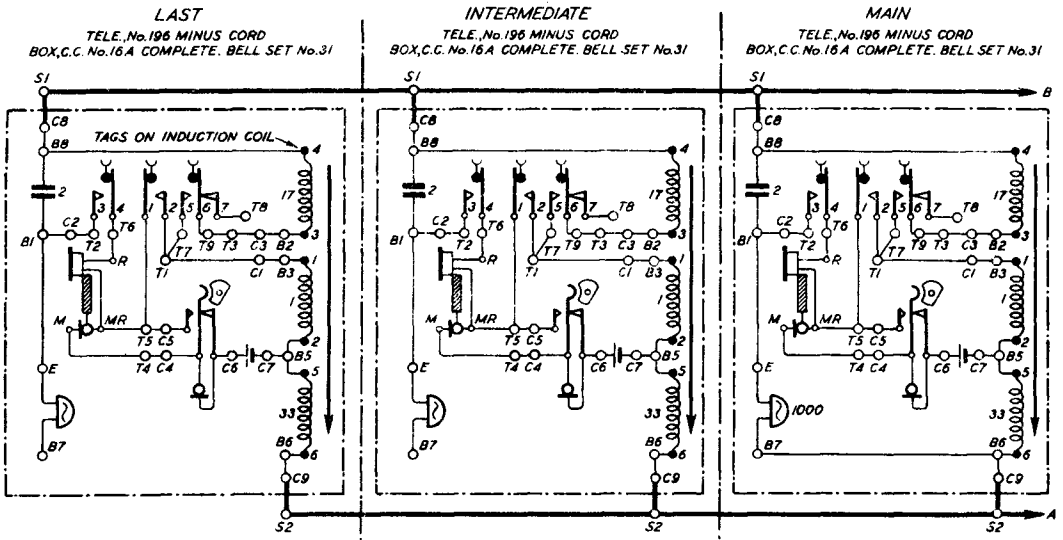

NUMBERS REFER TO TERMINALS. B = BELL SET. C = COIN BOX. S = STRIP. T = TELEPHONE.

Y

N 4127 3 PANELS - 2

NOTES.

1. UP TO SIX EXTENSIONS MAY BE FITTED ON PLAN No. 1B. IF ONLY ONE EXTENSION IS REQUIRED OMIT WIRING AND APPARATUS AT INTERMEDIATE STATION AND CONNECT AS FOR LAST STATION. WHERE MORE THAN TWO EXTENSIONS ARE REQUIRED, CONNECT ADDITIONAL STATIONS AS INTERMEDIATE.
2. THE CONNEXIONS IN "BOX, C.C. No. 16A COMPLETE" SHOWN THUS: --- SHOULD BE MADE LOCALLY.
3. WHEN THE EQUIPMENT IS FITTED ON A WALLBOARD, "CORD, INST. No. 6/25M 30" SHOULD BE USED. THE CORD SHOULD BE PASSED THROUGH A HOLE IN THE WALLBOARD IMMEDIATELY BEHIND THE "TELEPHONE No. 196 MINUS CORD" AND TERMINATED DIRECT ON THE CONNEXION STRIP IN "BOX, C.C. No. 16A COMPLETE." WHEN THE "TELEPHONE No. 196 MINUS CORD" IS REQUIRED TO STAND ON A DESK OR TABLE A "CORD, INST. No. 5/14B..." SHOULD BE USED AND A "STRIP, FLEX, C.C. 6 TERMINAL" FITTED (IF REQUIRED).
4. A "BACKBOARD FOR BOX, C.C. No. 16A" WILL BE REQUIRED WITH "BOX, C.C. No. 16A COMPLETE" WHEN THE LATTER IS FITTED TO A DESK OR TABLE.
5. REMOVE STRAPS BETWEEN TERMINALS 6 & 7 IN "BELL SET No. 31" AT EXTENSION STATIONS.
6. REMOVE STRAP AND CONNECT EXTENSION BELL BETWEEN TERMINALS 6 & 7 IN "BELL SET No. 31" AT MAIN WHEN REQUIRED.
7. PROVIDE "BATTERY LECLANCHE W'K4, WK2 OR WK1" 2 OR 3 CELLS ACCORDING TO REQUIREMENTS. (SEE E.I. TELEPHONE STATIONS A3205).
8. PLAN 1A SHOULD BE PROVIDED FOR NEW WORK.

N.B. PARTICULARS OF FACILITIES ETC., ON PLAN No. 1B ARE SHOWN ON DIAGRAM N 1436.  
THE MECHANICAL FEATURES OF "BOX, C.C. No. 16A" ARE SHOWN ON DIAGRAM N 1184.

# CALL OFFICE CIRCUIT - C.B.S. Nos. 2 & 3 SYSTEMS


## SUBSCRIBER'S EXTENSION WORKING, PLAN No. 1B (INTERNAL ONLY).

USING TELEPHONE No. 196 MINUS CORD, BOX, C.C. No. 16A COMPLETE & BELL SET No. 31. WIRING DIAGRAM.

N 4127

5-5-38

3 PANELS-3

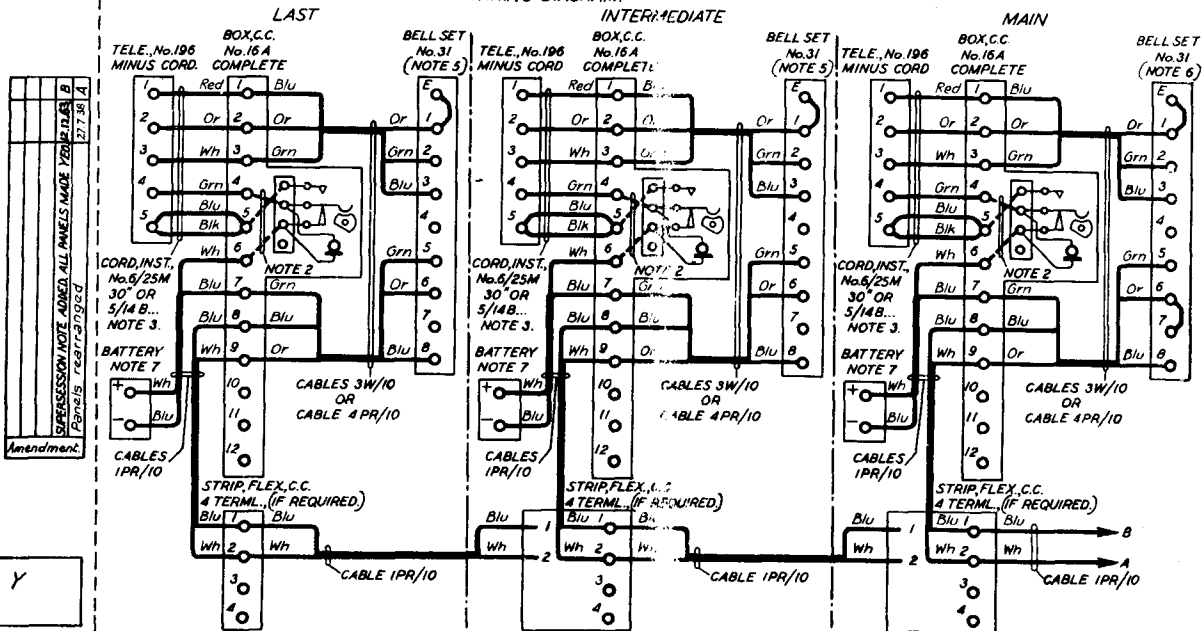

Amendment:

EXPRESSION NOTE ADDED ALL PANELS MADE YEAR 1938 B 277.36 A

Panels rearranged

Y