

N 4135 3 PANELS - 2

NOTES

1. THE CONNEXIONS IN "BOX C.C. No. 16A COMPLETE" SHOWN THUS:----- SHOULD BE MADE LOCALLY.
2. WHEN THE EQUIPMENT IS FITTED ON A WALLBOARD "CORD INST. No. 6/25M 30" SHOULD BE USED. THE CORD SHOULD BE PASSED THROUGH A HOLE IN THE WALLBOARD IMMEDIATELY BEHIND THE "TELE. No. 196 MINUS CORD" AND TERMINATED DIRECT ON THE CONNEXION STRIP IN BOX C.C. No. 16A COMPLETE. WHEN THE "TELE. No. 196 MINUS CORD" IS REQUIRED TO STAND ON A DESK OR TABLE A "CORD INST No. 5/14 B..." SHOULD BE USED, AND A "STRIP FLEX, CC 6 TERMINAL" FITTED IF REQUIRED.
3. A "BACKBOARD FOR BOX C.C. No. 16A" WILL BE REQUIRED WITH "BOX C.C. No. 16A COMPLETE" WHEN THE LATTER IS FITTED TO A DESK OR TABLE.
4. REMOVE STRAP AND CONNECT EXTENSION BELL BETWEEN TERMINALS 1 & E IN "BELL SET No. 31" AT MAIN OR BETWEEN TERMINALS 6 & 7 AT EXTENSION AS REQUIRED.
5. STRAP TERMINALS C AND Z IN "BELL SET No. 20."
6. FOR PLAN No. 7 STRAP TERMLs. A & A1, B & B1. FOR PLAN No. 7A OMIT STRAPS & FIT UNIT AUX APPS. CBS 536 (DIA. CBS 536 SHEET 2, FIG. 1) AT EXCH.
7. PROVIDE "BATTERY, LECLANCHE WK 4, WK 2 OR WK. 2 OR 3 BELL ACCORDING TO REQUIRMENTS (SEE E.I. TELEPHONE STATIONS A 3205)
8. TREMBLER BELL RINGING FROM EXTENSION TO MAIN MAY BE PROVIDED IN LIEU OF MAGNETO RINGING (ON INTERNAL EXTENSIONS ONLY) IF DESIRED. IN SUCH CASES OMIT GENERATOR AT EXTENSION AND PROVIDE APPARATUS AND WIRING SHOWN THUS:-----
9. IF A COIN BOX IS NOT REQUIRED AT THE EXTENSION STATION CONNECT APPROPRIATE TELEPHONE AS SHOWN IN DIAGRAM N 4110.
10. THIS DIAGRAM SUPERSEDES FOR NEW WORK:-

N 3530 N 3532
N 3531 N 3533

N.B. PARTICULARS OF FACILITIES ETC. OF PLAN NOS. 7 & 7A ARE SHOWN ON DIAGRAM N 1429
THE MECHANICAL FEATURES OF THE "BOX C.C. No. 16" ARE SHOWN ON DIAGRAM N 1184

THE FOLLOWING DIAGRAMS SHOW THE INTERNAL CONNEXIONS OF:-

- (1) TELEPHONE No. 196 MINUS CORD N 296
- (2) BELL SET No. 20 N 520.
- (3) BELL SET No. 31 N 531.

CIRCULATION

C.B.S. Nos. 2&3
& MAGNETO

CALL OFFICE CIRCUIT - C.B.S. No.2 & 3 SYSTEMS. SUBSCRIBER'S EXTENSION WORKING, PLAN Nos 7 & 7A (INTERNAL OR EXTERNAL). USING TELEPHONE No.196 MINUS CORD, BOX C.C. No.16A. COMPLETE & BELL SET No.31.

N 4135
24.4.36.

3 PANELS - 3


WIRING DIAGRAM.

EXTENSION

MAIN

				27.10.38	d
				27.7.38	A
Amendment.					
Note 6 amended					
Panels rearranged					

W

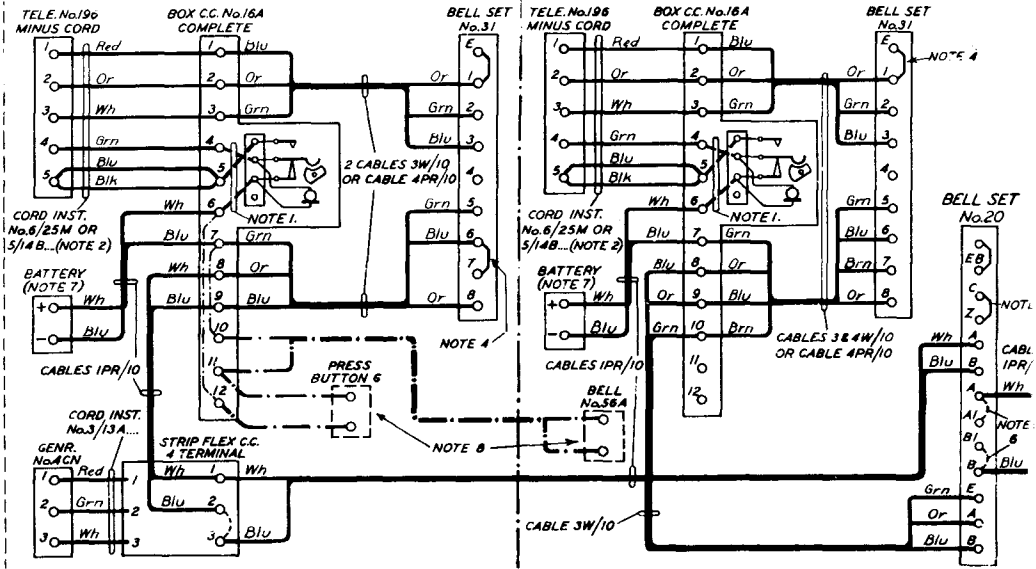

BELL SET No.20

EB

C

Z

A

AI

BI

B

E

A

B

NOTE 4

NOTE 7

NOTE 8

NOTE 1

NOTE 2

NOTE 4

NOTE 7

NOTE 8

NOTE 1

NOTE 2

NOTE 4

NOTE 7

NOTE 8