

CB & AUTOMATIC SYSTEMS
 PLAN 4 FACILITIES (INTERNAL ONLY)
 ON SUBSCRIBER'S EXTENSION PLAN IA (MAIN)
 USING TELEPHONES No. 332...

N4336
 PAGE 1-2
 ISSUE C

NOTES

GENERAL

1 The number of bells which may be connected in series should not exceed six

PLAN IA MAIN

2 For Plan IA connexions reference should be made to Dgm N4303 with the exception that Strap BT4-BT5 should be removed


3 If Extensions of Plan IA are not required strap BT1-BT5 at Main PLAN 4

4 Remove Cord, Inst. No. 2/94B... and Block, Terminal No. 20/4 from telephone, fit Cord, Inst. No. 6/28B Brown 72" and Plug No. 612. Remove Straps T1-T2 and T10-T11-T12

5 At each Jack No. 64A, connect Strap J1A-J6

6 At last Jack No. 64A, connect Straps J1A-J6 and J1-J5

7 Cord, Inst. No. 6/28B... cut the spare black conductor back at both ends

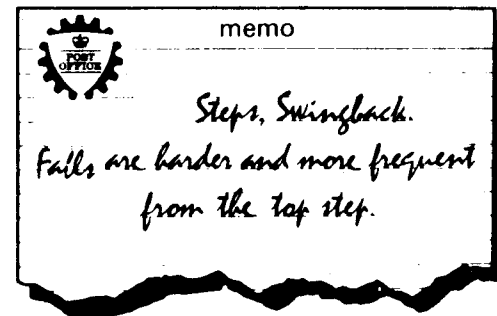

PG TELECOMMS HQRS	ISSUE		
PAPER - Y			
DISTN - CB & AUTO		C New format. Minor amendments. Made yellow	102.3
	B Notes amended. Notes 3 and 7 added		11.4.61

