


SWITCHBOARDS, AT 1810 AT 3718 AT 3796 & CB 887.

N 1096

16-10-35

FIG. 1
CORD CIRCUIT.

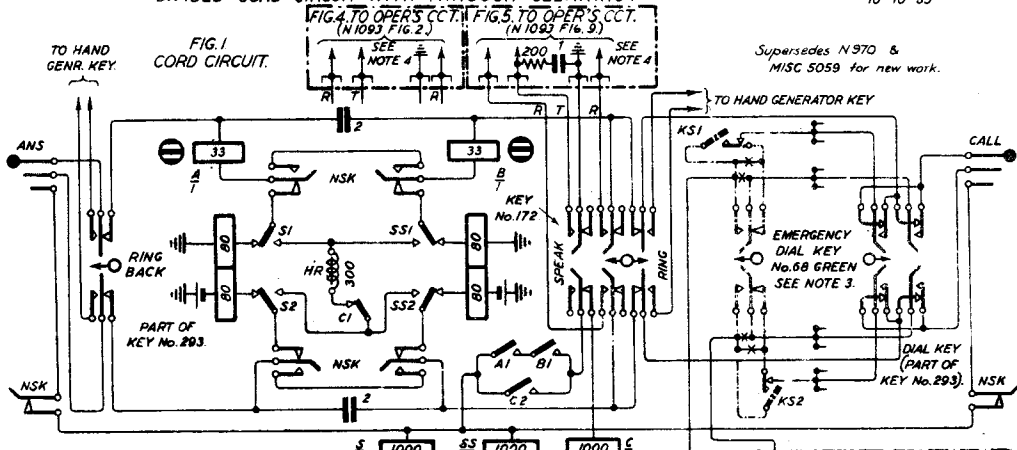

Supersedes N 970 &
MISC 5059 for new work.


COIL BRIDGING ADDED. CIRCULATION AMENDED. P. 3-36
 Figs 4 & 5 and Note 4 Added. Fig 2 Amended
 Dial No. AT 3899 Deleted.

Amendment

NOTES:-

1. A & B = INDICATORS 3300 B. C, S & SS = RELAY No. 502 A. KS = RELAY No. 509 A. HR = COIL BRIDGING, No. 6E. NIGHT SERVICE KEY (N.S.K.) = KEY No. 289.
2. IN MANUAL AREAS PART No. 1/11555 WILL BE FITTED ON THE KEY No. 293, TO PREVENT MOVEMENT TO THE DIAL POSITION.
3. THE ITEMS SHOWN DOTTED INDICATE THE CONNECTIONS FOR FITTING A KEYSENDER TO THE BOARD. THE WIRES MARKED 'X' TO BE CUT AND CONNECTED AS SHOWN. KEY No. 68 TO BE FITTED AT THE REAR OF THE HAND GENERATOR KEY AND SHOULD BE THROWN WHEN THE KEYSENDER IS REPLACED BY A DIAL.

FIG. 2. EXCHANGE LINE.

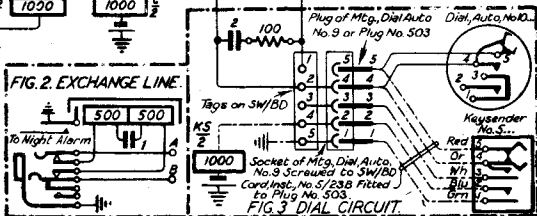

NOTE 4. FIG. 5 SUPERSEDES FIG. 4 FOR NEW WORK.

W