


EXPLANATORY

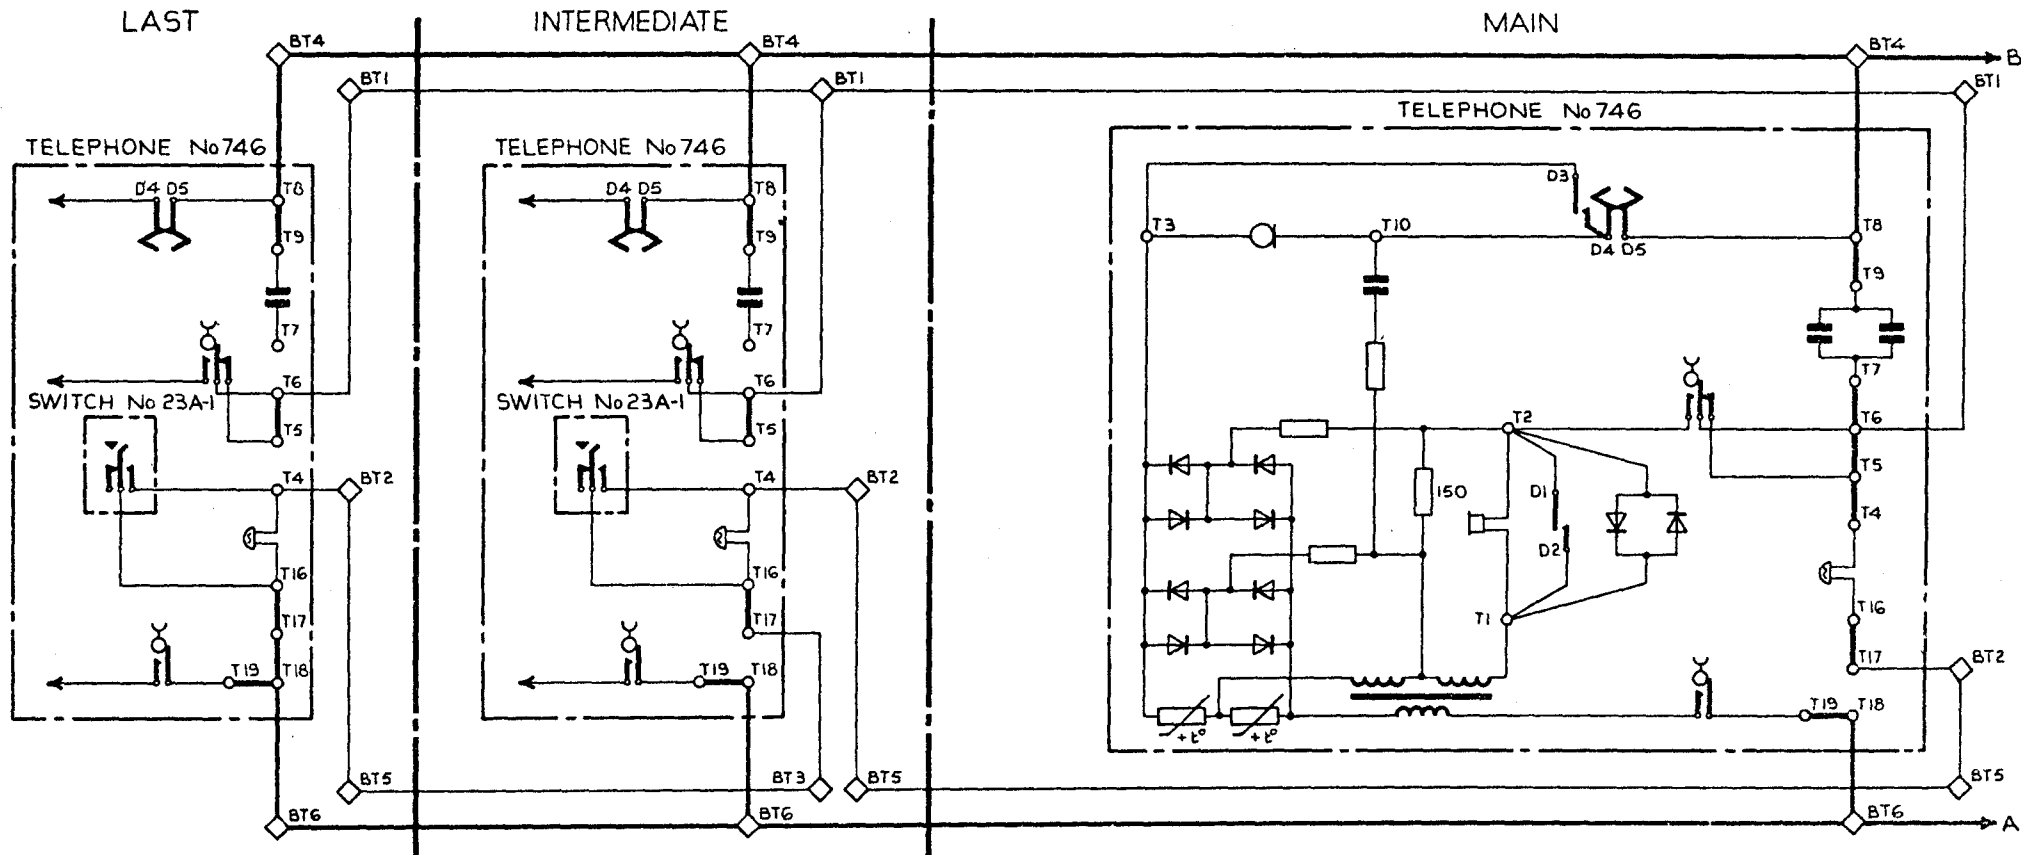

NOTES

- 1 THE FACILITIES OF PLAN 1A ARE SHOWN ON DIAGRAM N1425.
- 2 THIS DIAGRAM MAY ALSO BE USED FOR MAINTENANCE OF EXISTING PLAN 1C INSTALLATIONS WHICH ARE SIMILAR BUT HAVE NO BELL CUT-OFF SWITCH FITTED AT EXTENSIONS.

3 APPARATUS REQUIRED

MAIN

TELEPHONE No 746
BLOCK TERMINAL No 35A

EXTENSION

TELEPHONE No 746
CORD INST No 6/61 AT (INTERMEDIATE)
SWITCH No 23A-1
PART No 2/DBU/362
2 PART 1/DPI/203
BLOCK TERMINAL No 36B (INTERMEDIATE)
BLOCK TERMINAL No 35A (LAST)

- 4 FIT APPROPRIATE CORDS, BLOCKS TERMINAL, "ADD-ON" ITEMS AND STRAPS AS SHOWN.
- 5 WHEN AN EXTENSION BELL IS REQUIRED CONNECT IN PLACE OF STRAP BT2-BT5 AT MAIN OR EXTENSION AS REQUIRED.
- 6 THE EXCHANGE LINE MAY BE CONNECTED TO BLOCK TERMINAL AT EXTENSION IF MORE CONVENIENT.
- 7 SEE DIAGRAM N4700 FOR "ADD-ON" ITEMS WHEN ALTERNATIVE TELEPHONES ARE USED.

PO TELECOMMS. HQRS.	ISSUE		
PAPER:- W DISTN:- CB & AUTO		D REDRAWN, TELEPHONE CHANGED, NOTES 4 TO 7 REWRITTEN TD 231	30-5-74
		C REVISED FORM, TITLE AMENDED M.M.	2.12.65

WIRING

