
HANDSET No. 5 AMPLIFYING TELEPHONE CONNEXIONS TO 700-TYPE TELEPHONES

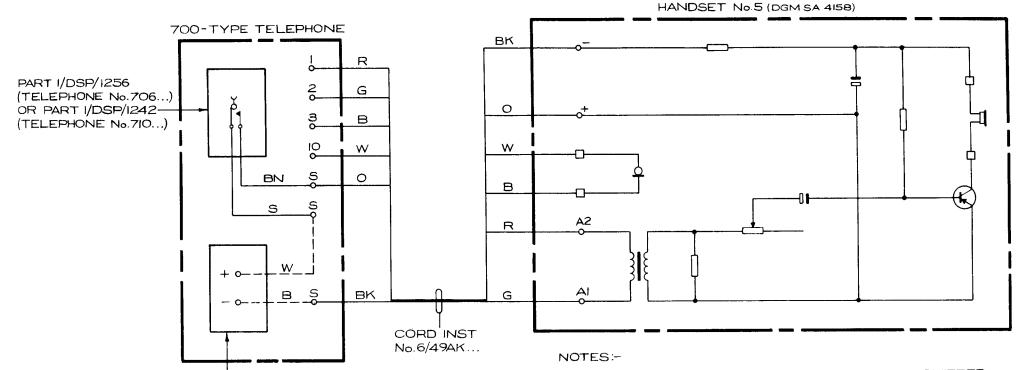

- CASE No. 118A TO ACCOMODATE 2 DRY
- CELLS (SEE EI TELEPHONES, STNS, FIIO2)

- 1 THE HANDSET No.5 IS FOR USE WHERE THE TRANSMITTER CURRENT IS LESS THAN 30mA.
- 2 REMOVE EXISTING HANDSET AND CORD AND CONNECT HANDSET No.5 TO TELEPHONE AS SHOWN.
- 3 FIT PART I/DSP/1256 IN TELEPHONE No. 706... OR PART I/DSP/1242 IN TELEPHONE No. 710...
- 4 CONNECT THE BN AND S WIRES OF THE AUXILIARY GRAVITY SWITCH SPRING-SET AND THE W AND B WIRES FROM THE CASE No. IIBA TO ANY THREE SPARE TERMINALS (S) IN THE 700-TYPE TELEPHONE.
- 5 HANDSET No.5 INCLUDES CORD INSTRUMENT No.6/49AK...
 TERMINALS MARKED [] ARE TRANSMITTER AND RECEIVER
 TERMINALS. TERMINALS MARKED O ARE 8BA TERMINALS ON
 PRINTED CIRCUIT BOARD.

PO TELECOMMS HQRS	E				
PAPER:-Y	ISSO	C	NEW FORMAT. MADE YELLOW. /// ABB	TD711	16-3-77
DISTN:- GENERAL		-	NEW FORMAT	SW	17-1-68