


AUTOMATIC SYSTEMS

EXTENSION PLANS 5 & 5A (INTERNAL ONLY)
 USING TELEPHONE No.706... AT EXTENSION AND
 BELL SET No. 20, 39A OR 44 AT MAIN.

N4508
 PAGE 1-2
 ISSUE B

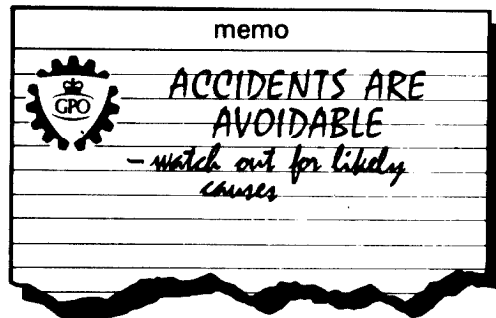

NOTES:

1. THIS DIAGRAM SHOWS THE USE OF THE TELEPHONE No.706... AS THE EXTENSION TELEPHONE OF PLANS 5 & 5A, WITH A BELL SET No.20, 39A OR 44 AND 200-TYPE OR 300-TYPE TELEPHONES AT THE MAIN AS SHOWN ON DGMS N4307 AND N4308.

2. APPARATUS REQUIRED AT EACH EXTENSION:

TELEPHONE No.706...	} ALL EXTENSIONS
SWITCH No.5A-3	
PART 3/DBU/263	
BELL No.56A	
BLOCK TERMINAL No. 368	
CORD INST No.6/61AT	EXTENSION 1 FROM BELL SET No.39A OR 44
CORD INST No.4/121AT	EXTENSION 2 FROM BELL SET No.39A OR 44
CORD INST No.6/61AT	EXTENSIONS 1 OR 2 FROM BELL SET No.20

3. RECOVER CORD INST No.3/108AA... FROM TELEPHONE No.706... AND FIT APPROPRIATE CORD AS REQUIRED. FIT SWITCH No.5A-3 AND PART 3/DBU/263.
4. REARRANGE STRAPS ON TELEPHONE No.706... AS SHOWN.
5. WHEN AN EXTENSION BELL IS REQUIRED, CONNECT IN PLACE OF STRAP BT2-BT3.
6. WHEN USING BELL SET No.20, FIT STRAP BT2-BT6 ON THE EXTENSION REQUIRING NIGHT SERVICE.
7. IF INTERCOMMUNICATION IS REQUIRED BETWEEN EXTENSIONS, CONNECT TWO CELLS, DRY, R40, IN PLACE OF STRAP BETWEEN BT4-BT8 AT EXTENSION 2.
8. SEE DGM N4700 FOR ADD-ON ITEMS WHEN ALTERNATIVE TELEPHONES ARE USED.
9. ON SOME LATER INSTALLATIONS WIRE W/G ON TERMINAL 9 WAS CHANGED TO BN.

P.O. TELECOMMS. HQRS.			
PAPER:- Y	ISSUE	B	New format. Made yellow. Pages rearranged. Notes 8&9 added. Minor amendments. D.I.F. TD7-1-1
DISTN:- CB & AUTO		A	Revised format. Sw 5A-3 was 5A-1. Pt 3/DBU/263 was Label No.358B. BT 36A was BT 20/B M.B.M.

FIG. 1. EXTENSIONS FROM BELL SET No. 39A OR 44.

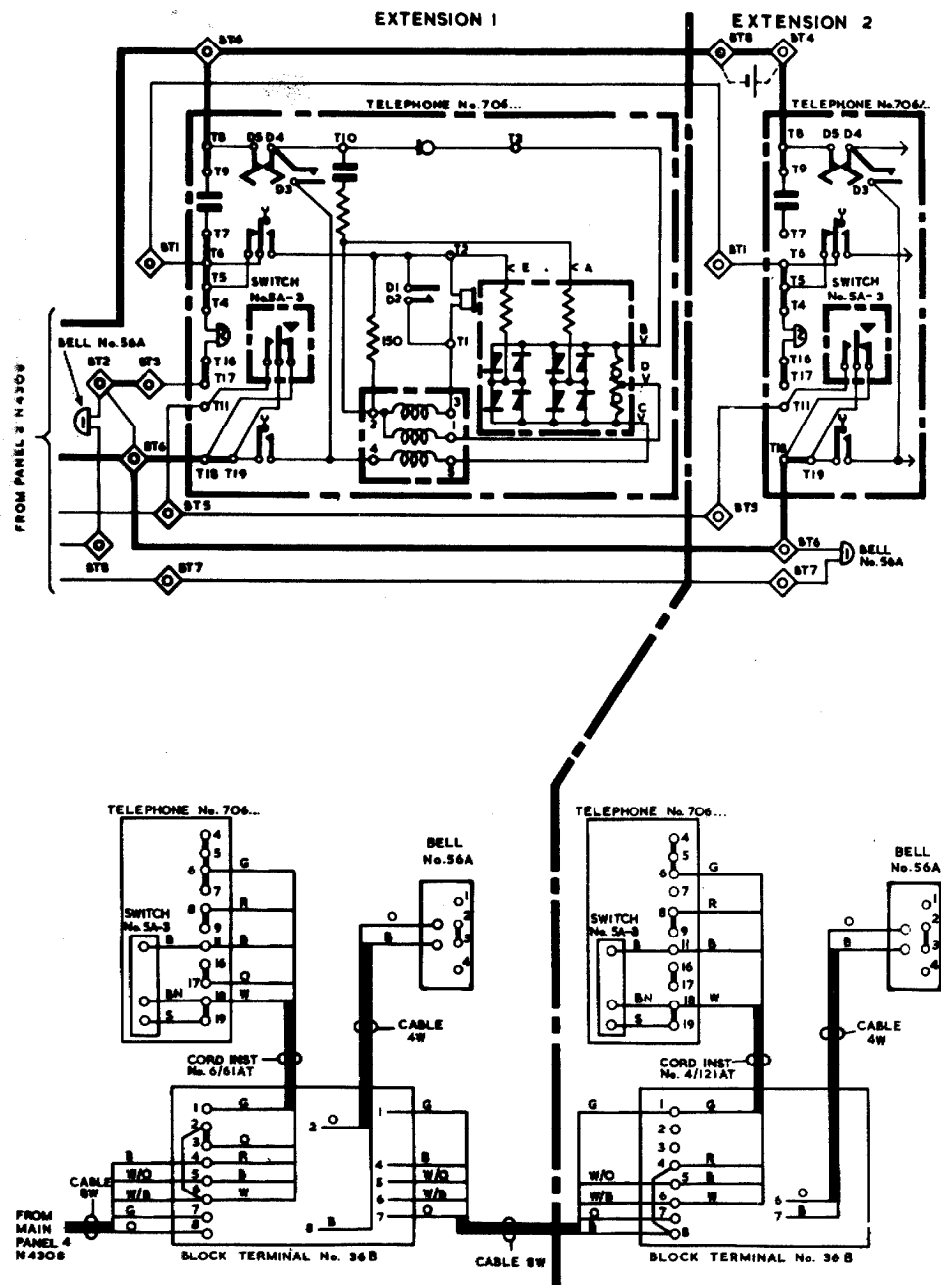


FIG. 2. EXTENSIONS FROM BELL SET No. 20.

