

AUTOMATIC SYSTEM

EXTENSION PLAN 12A (INTERNAL ONLY) USING TELEPHONES No 746 & 740

N 4514
PAGE 1-3
ISSUE B

NOTES:-

1. The facilities of Plan 12A are shown on Dgm. N1438
2. APPARATUS REQUIRED:-

MAIN

Telephone No. 740
Part 1/DSP/1243
Switch No. 5A-4
Bell No. 56A
Switch No. 23A-1
Part 2/DST/836
Part 3/DBU/372
Part 20/DBU/372
Block Terminal No. 36B
Cord Instrument No. 9/21AD...
Part 10/DBU/372
3 Parts 1/DPI/203

EXTENSION

Telephone No. 746
Switch No. 5A-4
Bell No. 56A
Part 1/DBU/362
3 Cells, Dry, R40
Block Terminal No. 36B
Cord Instrument No. 9/21AD...
Box Battery No. 3
Part 1/DPL/1022
2 Parts 1/DPI/203

3. Rearrange Straps on Telephones and Blocks, Terminate as shown. Fit Part 2/DST/836.
4. At Main, fit Part 1/DSP/1243 with Part 20/DBU/372 in position B. Fit Switch No. 5A-4 in position C with Part 3/DBU/372 and Switch No. 23A-1 with Part 10/DBU/372 in position A. Adjust Latches:- A to position 3, C to position 2, and B to position 1. X & Y Latches should be at setting 1 (See Dgm. N848).

5. At Extension fit Switch No. 5A-4
6. Fit appropriate Cords to Telephones.
7. EXTENSION BELL

At Main, disconnect Strap and connect Bell to BT7-BT9.

At Extension, remove Straps T16-T17 in Telephone and connect to BT6-BT12.
8. See Dgm. N4700 for "add-on" items when alternative Telephones are used.


PO TELECOMMS HQRS.	ISSUE			
PAPER:- W		B	TELES CHANGED, NOTE 8 ADDED <i>ML</i>	TD7.1.1
DISTN:- CB & AUTO		A	REVISED FORM BT 36A WAS 31A. MINOR CORRECTIONS. D.A.L.	24.1.66

26-7-74

EXPLANATORY

EXTENSION

MAIN

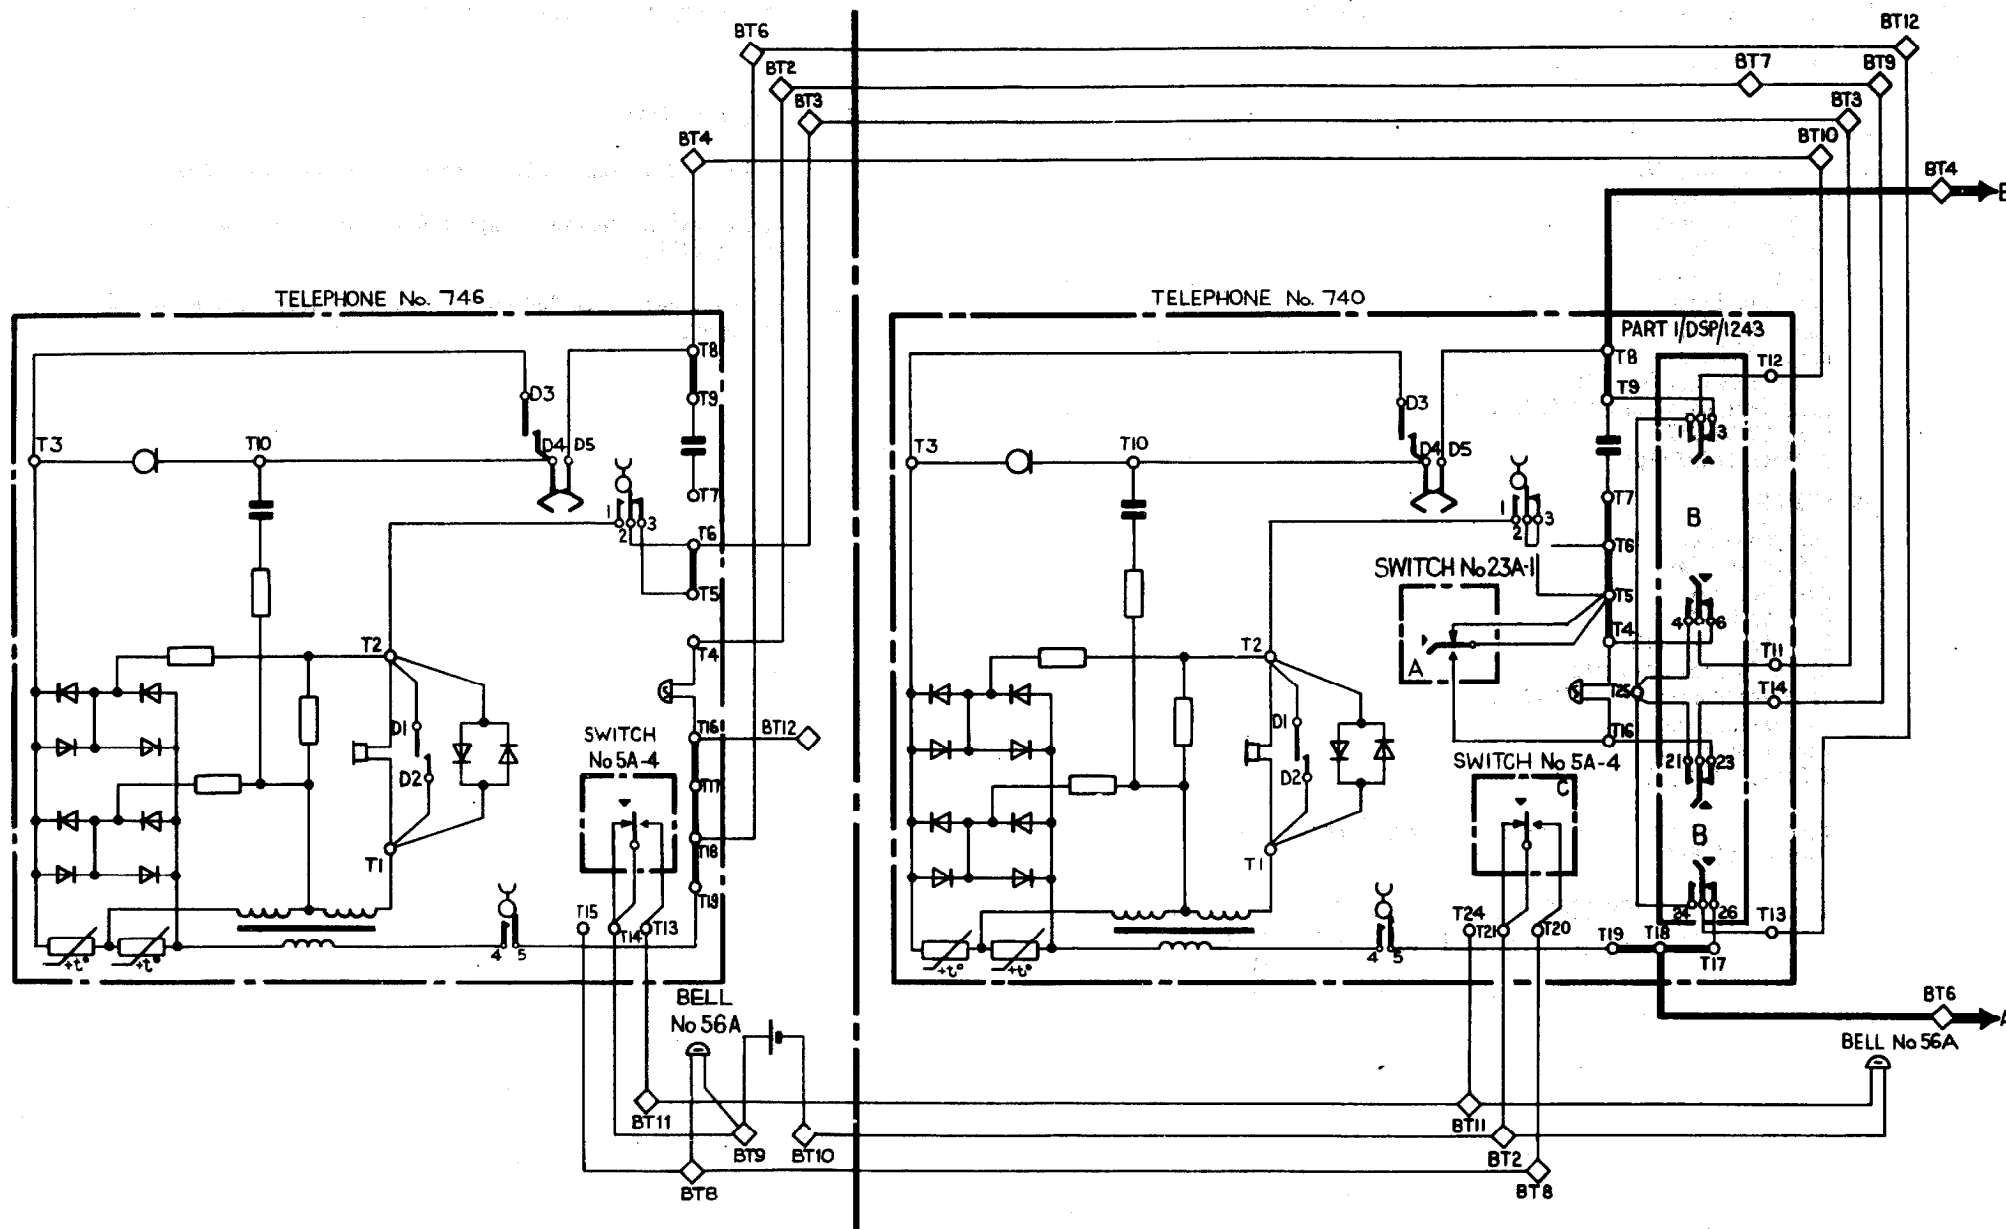

EXTENSION

WIRING

MAIN

TELEPHONE
No 740

PART 1/DSP/1243

