

AUTOMATIC SYSTEM  
 PLAN 4 FACILITIES (INTERNAL ONLY)  
 ON EXCHANGE LINE OF EXTENSION  
 PLAN 1, USING TELEPHONE No.746

N4519  
 PAGE 1-3  
 ISSUE E

NOTES:-

1. See Dgm. N4700 for "add-on" items when alternative Telephones are used.

PLAN 1 MAIN

2. Extensions Plan 1 should be connected as on Dgm. N4501. At the Main Strap BT2-BT3 should be removed and the white conductor of the Telephone Cord terminated on BT6.

PLAN 4

3. Using one Telephone No. 746.  
 Recover Cord Inst No. 4/121AT and Block Terminal 52A from Telephone. Rearrange Straps, fit Plug No. 420... with Cord Inst No. 4/97AD... and connect as shown in Fig. 1.

At last Jack No. 95A connect Strap J1-J4A.

4. Using two or more Telephones No. 746.  
 Recover Cord Inst No. 4/121AT and Block Terminal 52A from Telephones. Rearrange straps, fit Switch No. 198-1 and Plug No. 420... with Cord Inst No. 4/97AD... and connect as shown in Fig. 2.

At each Jack No. 95A connect Strap J1-J4A and at Last Jack No. 95A connect additional Strap J1-J2.

PO TELECOMMS HQRS. PAPER:-W DISTN:- CB & AUTO	ISSUE			
		B	TELES CHANGED, NEW FORMAT, NOTES REVISED <i>ML</i> TD7.1.1	1-7-74
		A	REVISED FORM, NOTES 2 & 4: FIG. REFS. WERE PNL, REFS, COLOURS & LENGTHS DELETED FROM CORDS & PLUGS	13.1.66

FIG. 1. USING ONE TELEPHONE No. 746..., PLUG, No. 420 & JACKS, No. 95A

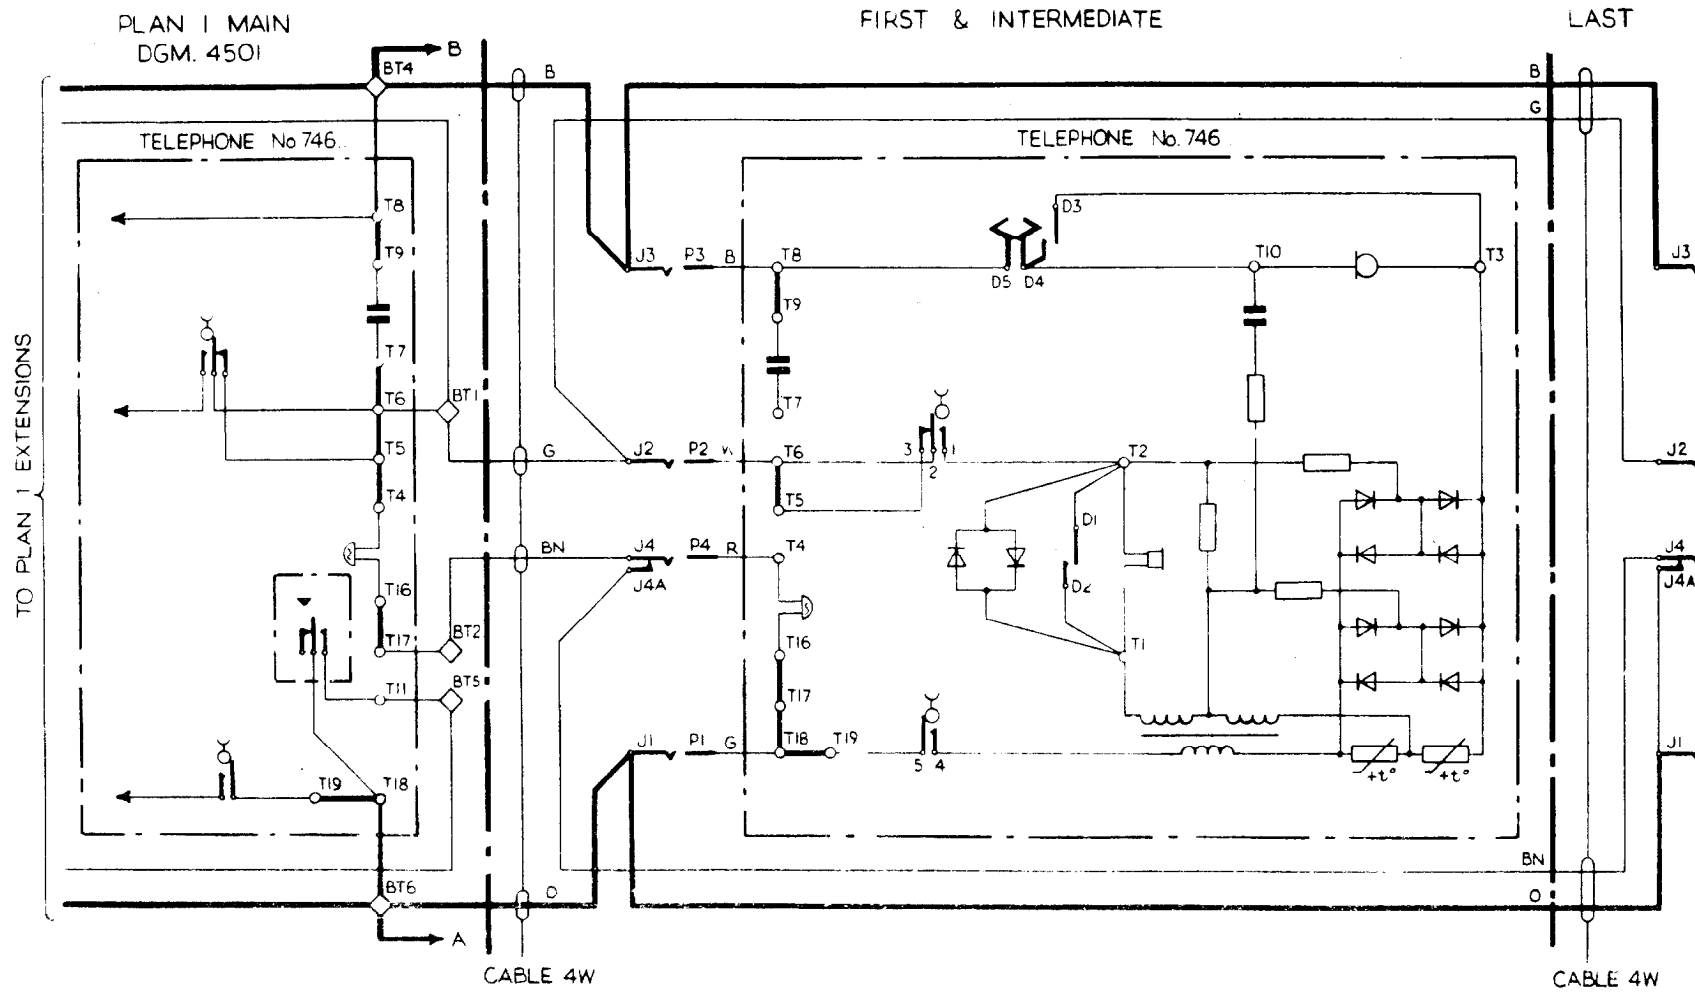


FIG. 2 USING TWO OR MORE TELEPHONES No. 746 PLUGS No. 420 & JACKS No. 95 A

