

C.B. & AUTOMATIC SYSTEMS

SUBSCRIBER'S EXTENSION PLAN 10 (INTERNAL ONLY) ON 2-WIRE
P.B.X.'S WITH RECALL USING TELEPHONES No. 710...

N 4553

4 PANELS - 1

24-12-62


NOTES :-

1. THE FACILITIES OF PLAN 10 ARE GIVEN ON DGM. N 1433.
2. **APPARATUS REQUIRED :-**

TELEPHONE No. 710...	2 PARTS 1/DSP/1244
SWITCH No. 5A-4	2 PARTS 1/DST/ 836
BELL-SET No. 26	PART 5/DBU/260
BLOCK, TERMINAL No. 37A	PART 6/DBU/260
CORD, INSTRUMENT No. 18/O4 AJ...	PART 8/DBU/260
3. REARRANGE STRAPS ON TELEPHONE AND BLOCK TERMINAL AS INDICATED AND FIT PARTS 1/DST/836.
4. FIT PART No. 1/DSP/1244 WITH PART 5/DBU/260 IN POSITION A.
FIT PART No. 1/DSP/1244 WITH PART 6/DBU/260 IN POSITION B.
FIT SWITCH No. 5A-4 WITH PART 8/DBU/260 IN POSITION D.
ADJUST LATCHES A & B TO SETTING 1 AND LATCH D TO SETTING 3.
LATCHES X & Y SHOULD BE ADJUSTED TO SETTING 4 (SEE DGM. N 848 PANEL 4).
5. THE BLU - BRN CONDUCTOR OF THE CORD INSTRUMENT IS SPARE BUT IT SHOULD BE TERMINATED AT BOTH ENDS ON THE SPARE TERMINALS INDICATED. THE BLU AND THE OR CONDUCTOR SHOULD BE CUT BACK AT BOTH ENDS.
6. EXTENSION BELL IF REQUIRED :- REMOVE STRAPS T 16 - 17 AND WIRE FROM BT 11 & 12.
7. STRAP T 8 - T 9 OF TELE. FOR 'EARTH LOOP' RECALL. OMIT STRAP FOR 'ONE LINE EARTH LOOP DISCONNEXION' RECALL.

N4553


4 PANELS -2

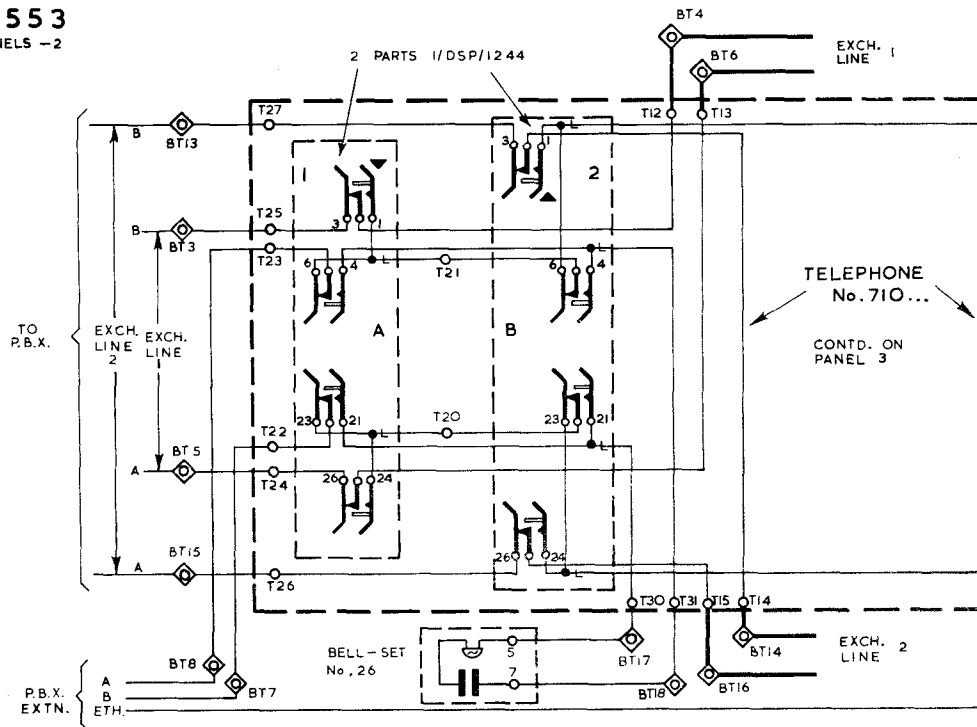

N4553

4 PANELS -3

24-12-62

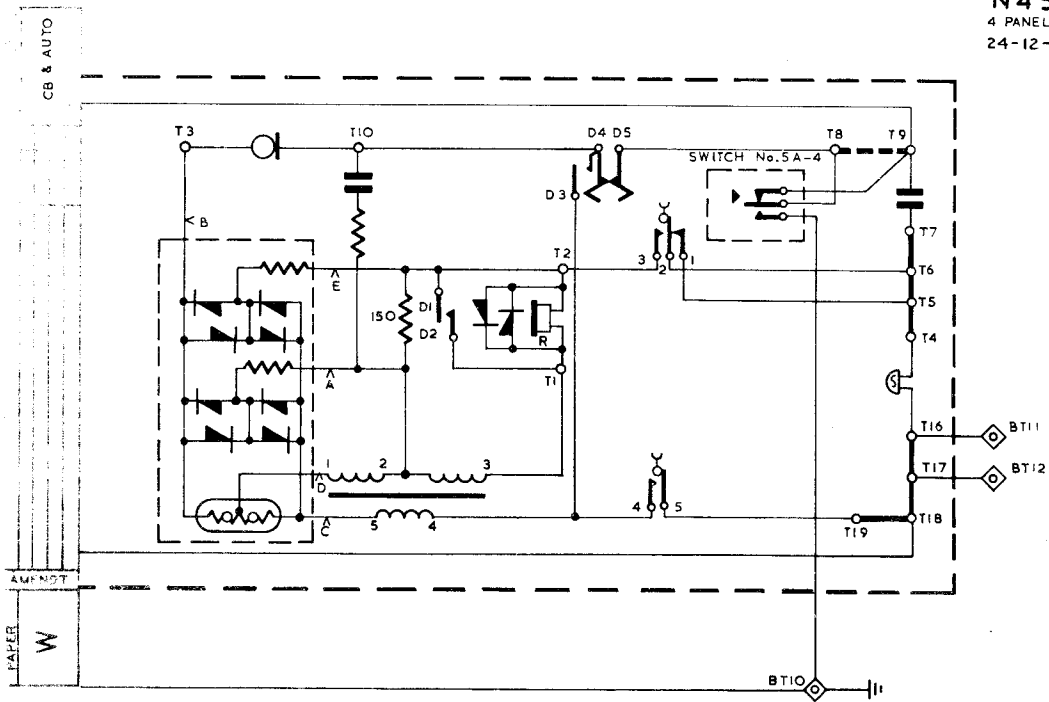

N 4553

4 PANELS - 4

