TELEPRINTER ANCILLARY WORKING AT OUT OFFICES. TG(L)1029.

2 WAY SIMPLEX NON-RELAYED CIRCUIT WITH SWITCH TO RESERVE FACILITY.

5·5·36.

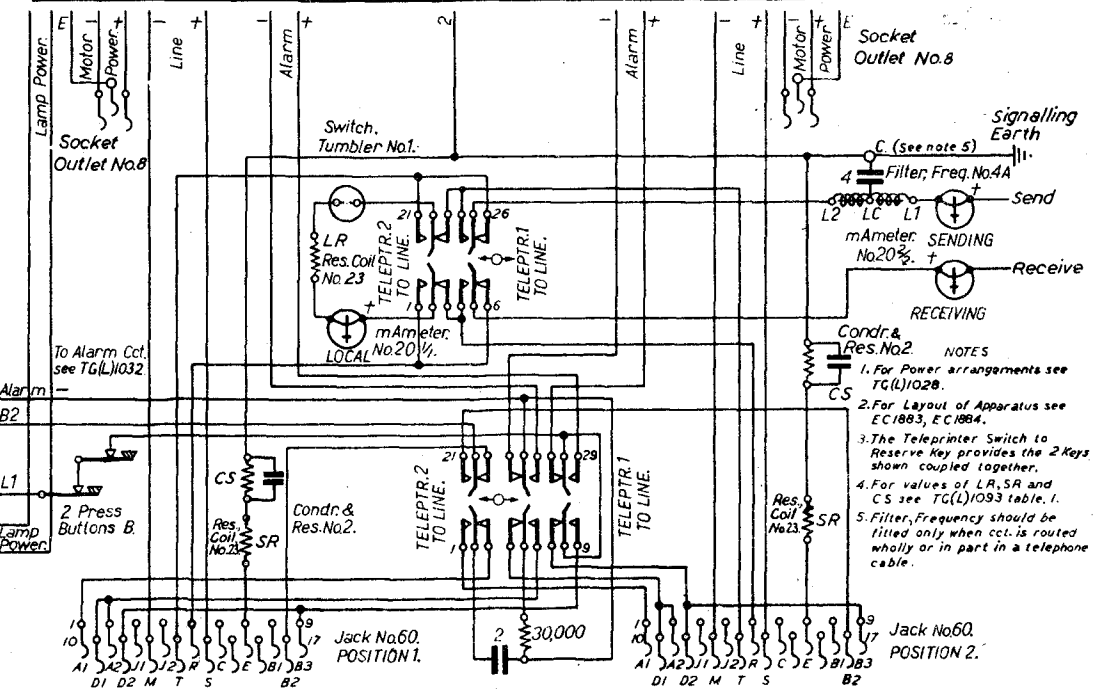

NOTES

1. For Power arrangements see TG(L)1028.
2. For Layout of Apparatus see EC1883, EC1884.
3. The Teleprinter Switch to Reserve Key provides the 2 Keys shown coupled together.
4. For values of LR, SR and CS see TG(L)1093 table. 1.
5. Filter, Frequency should be fitted only when cct. is routed wholly or in part in a telephone cable.

Amendment.			
Res. Coil No. was 3500. L.L. No. was A1029. Power Sockets were Sockets A. Res. S.R. added. 2nd Press Button added. Note 3.	29·7·36	4·10·37	3·1·39
	A	B	C

SOCKET OUTLET No.8 WAS PLUG WALL No.8 SOCKET & SWITCH RES. COIL No.23 WAS RES. COIL No.1.

D 7·5·41.