

HES No.3 (KEYMASTER)
PROVISION OF INDIVIDUAL EXCHANGE
OR PBX LINE AT A MULTIPLE STATION

NOTES :-

1. DISCONNECT MULTIPLE WIRING SHOWN DOTTED FROM BT37B TERMINALS 1, 2, 5, 6, 17 AND 18, AND RECONNECT ON THREE SPARE TERMINALS 21, 22, 23, REMOVE STRAP BETWEEN T16 AND T17 IF EXISTING.
2. SPARE MULTIPLE PAIRS EXISTING MAY BE USED FOR EXCLUSIVE EXCHANGE LINE, OTHERWISE PROVIDE EXTRA WIRING.
3. CAPACITOR No. 7712-2 IS MOUNTED ON A CLIP No. 90.
4. CLIP TO BE MOUNTED AT BASE OF LEFT HAND GRAVITY SWITCH PILLAR VIEWED FROM FRONT OF TELEPHONE.
5. IN THE TELEPHONE TRANSFER BLUE & WHITE LINE CORD CONDUCTORS FROM TERMINALS T20 AND T35 TO SPARE TERMINALS T13 AND T14.
6. STRAP TERMINALS 20 AND 35 TO GIVE PERMANENT RED SUPERVISORY DURING ENGAGED AND HOLD CONDITIONS.

PO TELECOMMS HQRS COLOUR: W DISTN: - GENERAL	ISSUE			
		B	NEW FORMAT. CORD WAS CORD INST 20/O3AJ JAR	17-6-74
		A	NOTES 5 & 6 ADDED	22-8-63
			TD 7-2-3	31-5-62

WIRING MODIFICATIONS

FIG. 1 NOTE 1

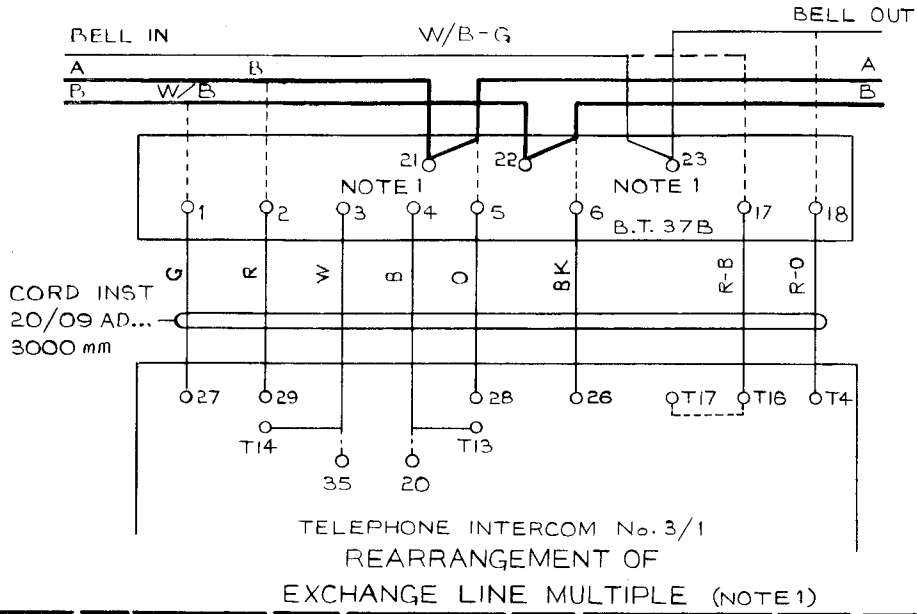


FIG. 2

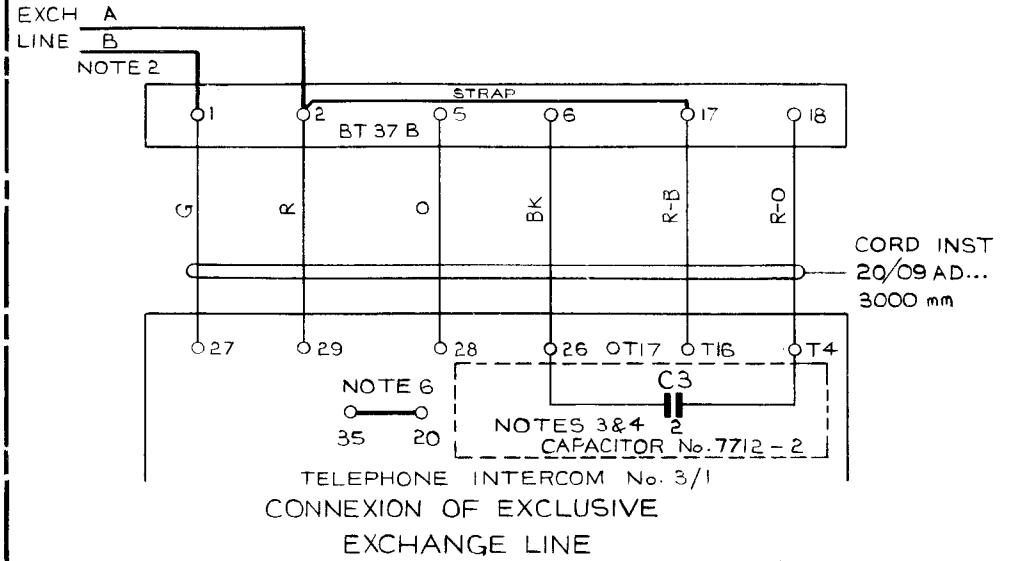


FIG. 3

SCHEMATIC

EXCH LINE

