


H.E.S. No.3

NON-MULTIPLE EXTENSION
 PLAN 1 (INTERNAL ONLY)
 USING TELEPHONE No.710...

BOED BCH PAPERS W PROVISION- GENERAL	ISSUE		
	B	NOTE 6 AMENDED. MINOR AMENDMENTS	17-3-70
	A	NEW FORMAT, MINOR AMENDMENTS	9-2-66
		J. H. COMBRIDGE TD 2-33	20-8-66

NOTES

1. THE FACILITIES OF PLAN I ARE SHOWN ON DIAGRAM NI424.
2. REARRANGE THE STRAPS ON TELEPHONES AND BLOCKS TERMINAL AS SHOWN.
3. BELL No.56A COILS TO BE CONNECTED IN SERIES.
4. EARTH, AND THE LINE A AND B WIRES, MAY BE CONNECTED TO BT2, BT6 AND BT4 AT AN EXTENSION IF MORE CONVENIENT.
5. EACH TELEPHONE COVER. FIT PART 22/DBU/260 IN POSITION B.
 AND " " 23/DBU/260 " " C
 COVER OF MAIN TELEPHONE WITH ONE EXTENSION. FIT PART 25/DBU/260 IN POSITION A.
 " " " " TWO EXTNS. ALSO " " 26/DBU/260 " " D.
6. EACH TELEPHONE. REMOVE PLUNGERS FROM B AND C.
 FIT PART 1/DPL/379 IN POSITION B WITH SWITCH 5A-4 (METAL BRACKET TYPE) OR SWITCH 5A-4A.
 FIT PART 1/DPL/378 IN POSITION C WITH SWITCH 5A-4.
 MAIN TELEPHONE WITH ONE EXTENSION. FIT SWITCH 5A-4 IN POSITION A.
 " " " TWO " S. " ADDITIONAL SWITCH 5A-4 IN POSITION D.
 ADJUST LATCHING BRACKET AS SHOWN.

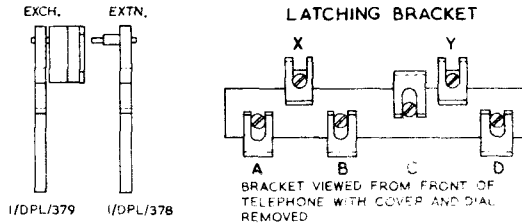

7. WHEN EXTENSION BELL IS REQUIRED. RECOVER CORD INST. 6/44AA, AND BLOCK TERMINAL No. 35A. PROVIDE CORD INST. 9/21AD, AND BLOCK TERMINAL No. 36A. IN TELEPHONE REMOVE STRAP BETWEEN TERMINALS T17 AND T18, CONNECT BROWN CORD CONDUCTOR TO T17, SLATE CONDUCTOR TO T18. IN BLOCK TERMINAL No. 36, REMOVE ALL STRAPS, CONNECT BROWN CORD CONDUCTOR TO BT7, SLATE CONDUCTOR TO BT8. CONNECT BELL OR MAXIMUM OF TWO BELLS IN SERIES BETWEEN TERMINALS BT7 AND BT8.
8. ANY SPARE LEADS SHOULD BE SECURED ON SPARE TERMINALS OR ELECTRICALLY INSULATED.

APPARATUS REQUIRED

MAIN AND ONE EXTN.	ITEM	MAIN AND TWO EXTNS.
2	TELEPHONES No. 710	3
2	PARTS 1/DPL/378	3
2	PARTS 1/DPL/379	3
2	PARTS 22/DBU/260	3
2	PARTS 23/DBU/260	3
1	PART 25/DBU/260	1
-	PART 26/DBU/260	1
4	SWITCHES No. 5A-4	5
2	SWITCHES No. 5A-4A	3
1	THERMISTOR No. 1A-1	1
2	BLOCK TERMINAL No. 35A	3
1	CORD, INST. 6/44AA	1
1	CORD INST 4/83AA	2

NOTE 6

