# TELEPRINTER ANCILLARY WORKING AT OUT OFFICES. TG(L)1040.

10·6·36.

## DUPLEX CIRCUIT WITH SWITCH TO RESERVE FACILITY.

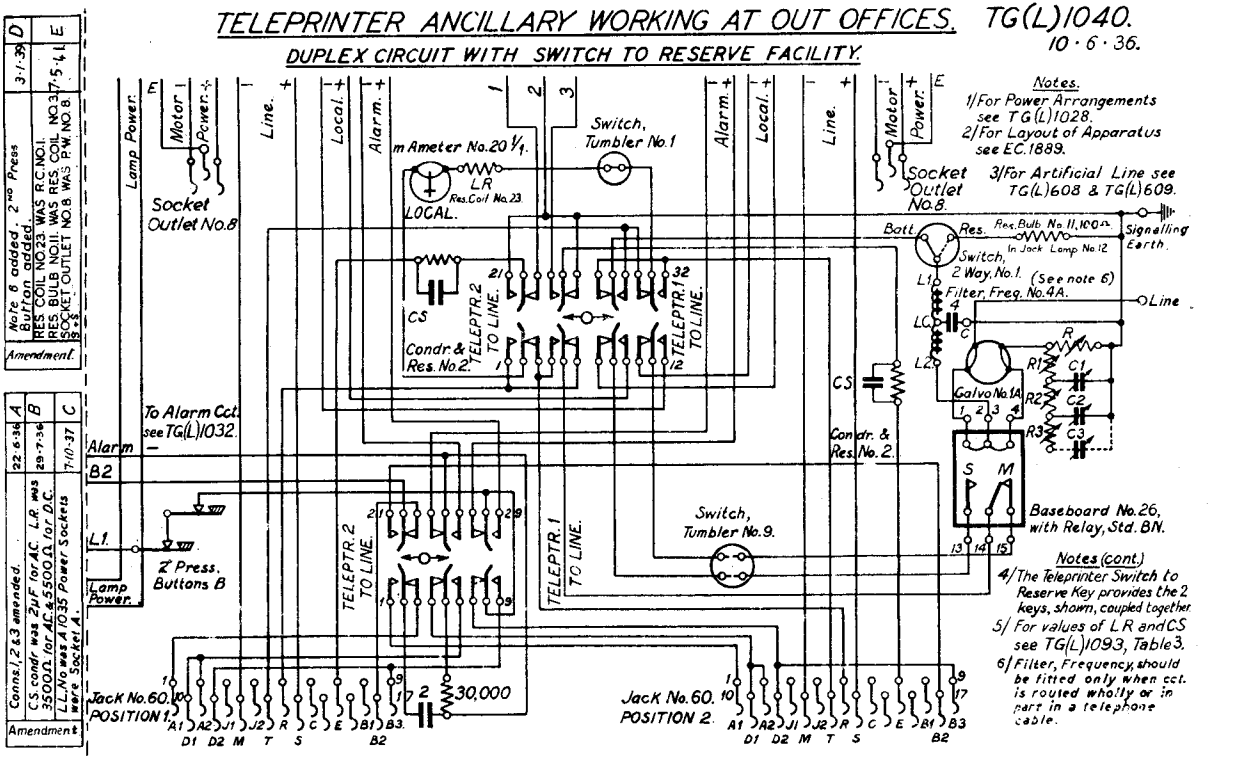


Notes.

1/For Power Arrangements see TG(L)1028.

2/For Layout of Apparatus see EC.1889.

3/For Artificial Line see TG(L)608 & TG(L)609.

Notes (cont.)

4/The Teleprinter Switch to Reserve Key provides the 2 keys, shown, coupled together

5/For values of LR and CS see TG(L)1093, Table 3.

6/Filter, Frequency, should be fitted only when cct. is routed wholly or in part in a telephone cable.

| Amendment | | |
|---|---|---|
| Note 6 added. 2nd Press Button added. | 3·1·39 | D |
| RES. COIL NO.23. WAS R.C.NO.1. RES. BULB NO.11. WAS RES. COIL NO.3. SOCKET OUTLET NO.8 WAS P.W.NO.8. | 7·5·41 | E |

| Amendment | | |
|---|---|---|
| Conns.1, 2 & 3 amended. | 22·6·36 | A |
| CS. condr. was 2μF for AC. L.R. was 350Ω for AC. & 5500Ω for D.C. | 29·7·36 | B |
| L.L. No was A 1035 Power Sockets were Socket A. | 7·10·37 | C |