


TELEPRINTER WORKING AT NON-PANEL MOUNTED OFFICES. TG(L) 1042.

2 WAY SIMPLEX NON-RELAYED CIRCUIT WITH SWITCH TO RESERVE FACILITY.

23-6-36.

Note 6 added. 3-1-39
 Note 2 EC 1928 & 1929 deleted. 1-11-37
 LL No was A1037. Power up to 1.1
 B Sockets were Socket A.
 A Res. Coil No. 1 was 3500. 2-29-36.
 D SOCKET OUTLET No. 8. WIRE PLUG/HALL NO. 8. SOCKET & SWITCH RES. COIL. MOTOR WAS KLS. COIL NO. 7. 5. 4.

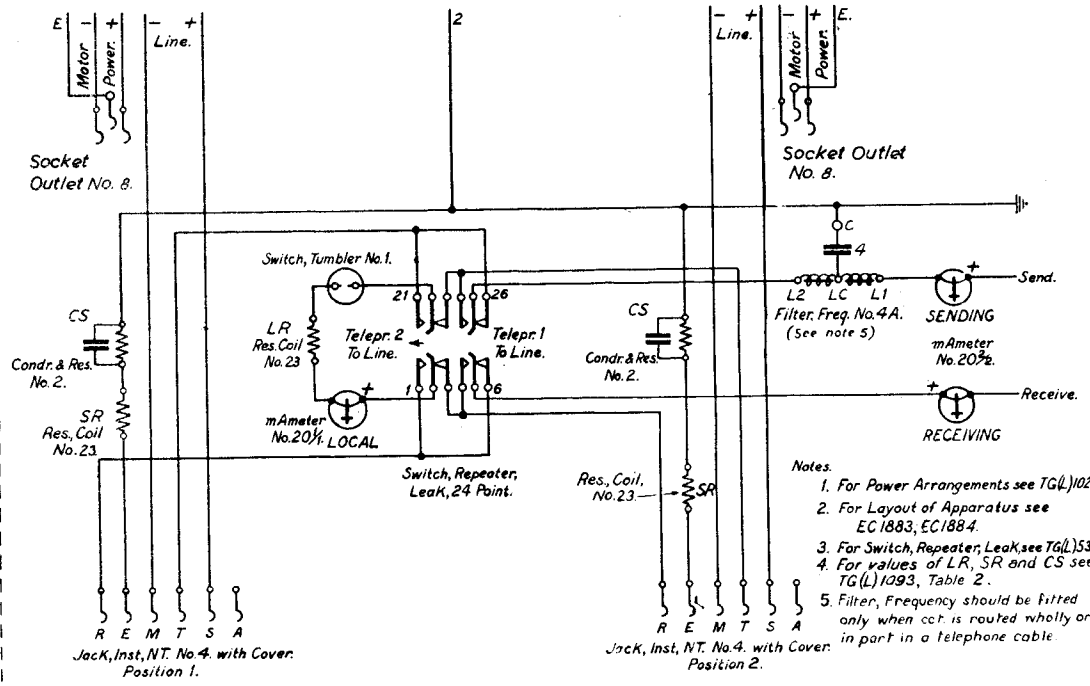

- Notes.**
1. For Power Arrangements see TG(L) 1028.
 2. For Layout of Apparatus see EC 1883, EC 1884.
 3. For Switch, Repeater, Leak, see TG(L) 536.
 4. For values of LR, SR and CS see TG(L) 1093, Table 2.
 5. Filter, Frequency should be fitted only when cct. is routed wholly or in part in a telephone cable.