


INSTALLATIONS FOR UP TO 5, 2 LOOP (4 WIRE) CIRCUITS
WHERE UNITS TG 43B ARE REQUIRED.

TG/TGW (L) 11005

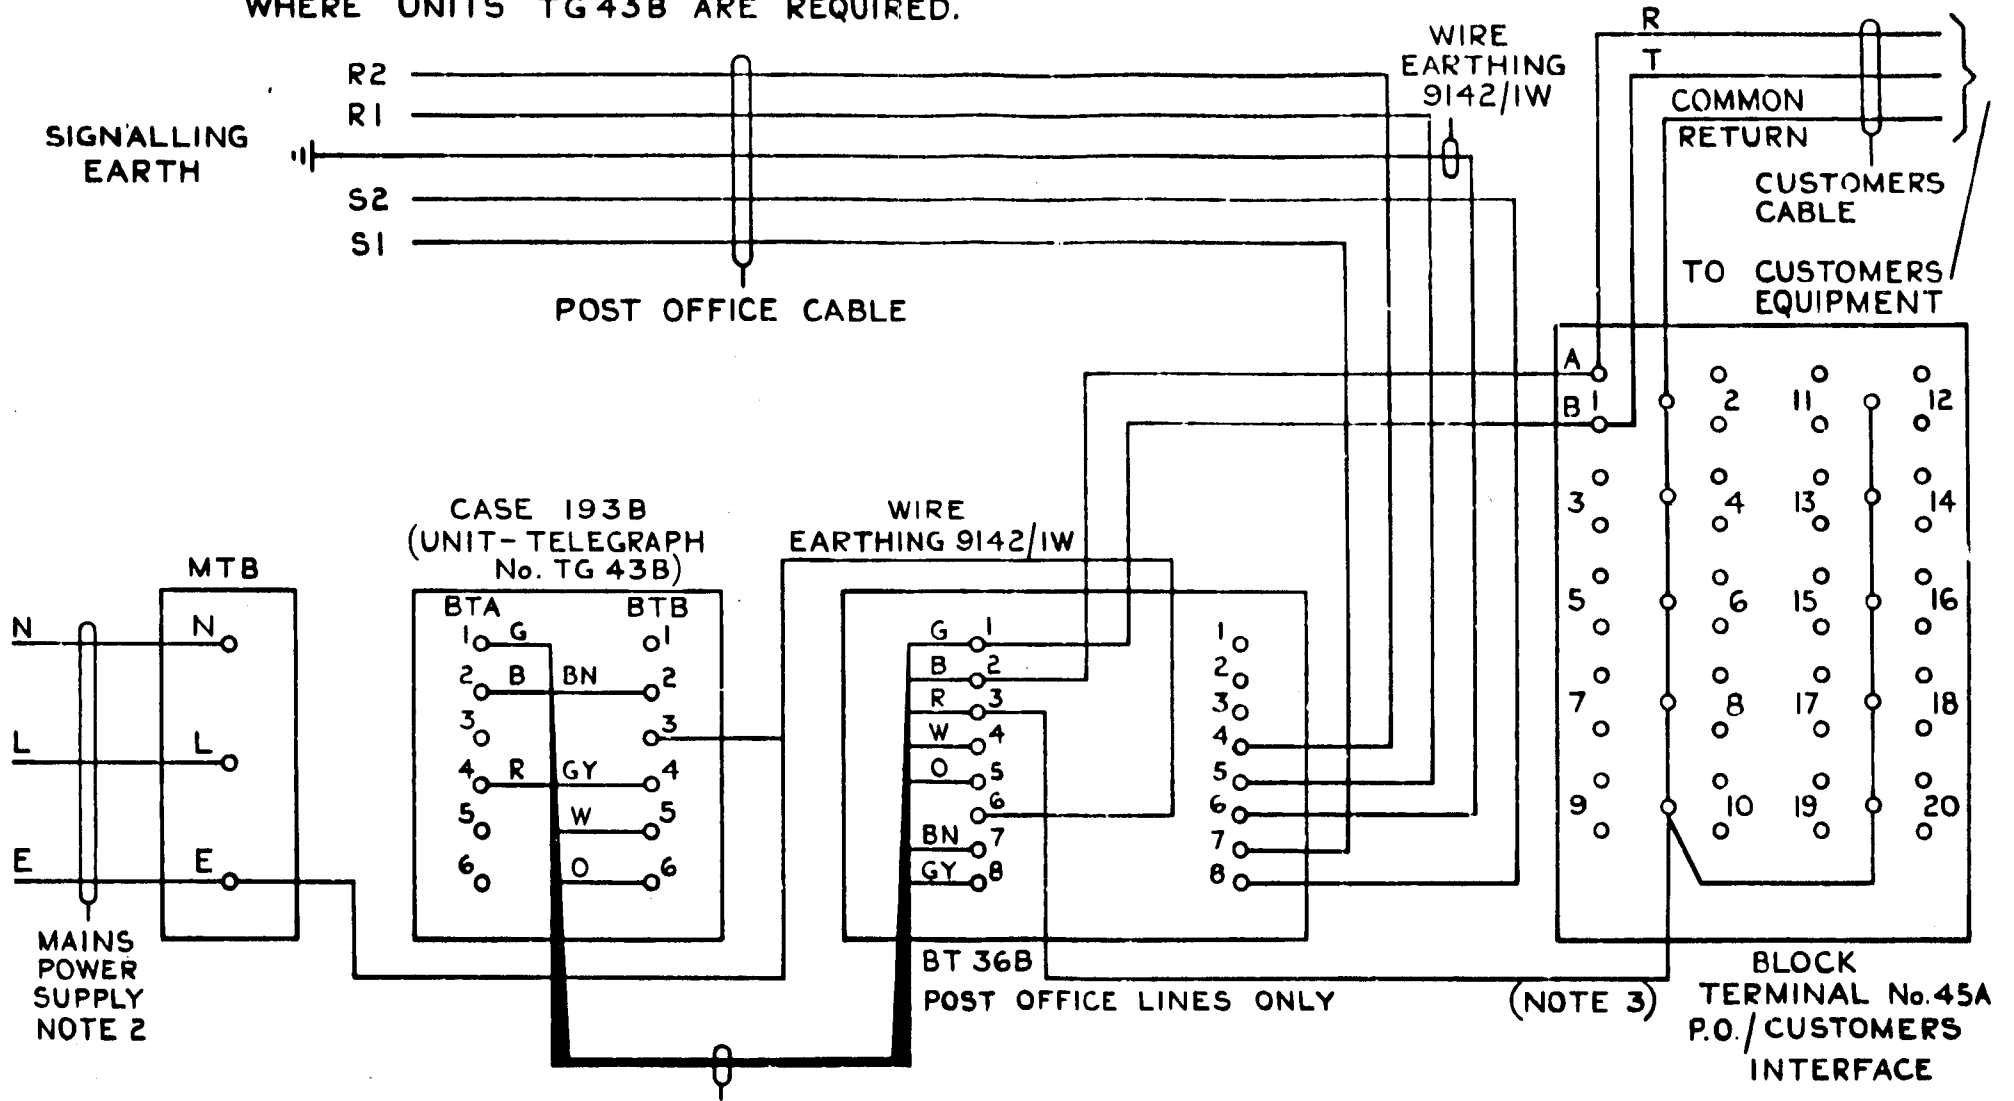

CORD INSTRUMENT
No. 8/12 AA
GREY (SEE NOTE 1)

NOTES :-

1. THE SPARE WIRE AND RED WIRE SHOULD BE INSULATED AND TIED BACK.
2. CORD FLEXIBLE 3183Y 0.75 mm.

© THE POST OFFICE 1976

DRN	3	ISSUE	MINOR CKT CHANGE	25-2-77
CKD	<i>[Signature]</i>			
CERTIFICATION ENG.	<i>[Signature]</i>			
D.O.	<i>[Signature]</i>			
DATE	22-11-76			