

FIG. 1 EXPLANATORY

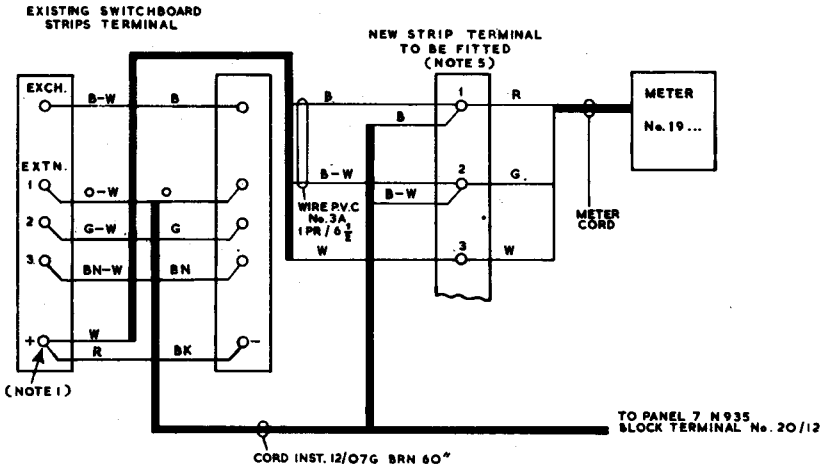


FIG. 2 CABLING FOR SWBD. 1+3 USING  
 CORD INST. No. 12/07G BRN 60"

Post Office  
 Telecomms.  
 Headquarters  
 TD 1. 5. 2.  
 Paper W  
 Circulation  
 GENERAL

ISSUES			
	A	New Format	19-8-68
		E.C. Stevens	11-12-59

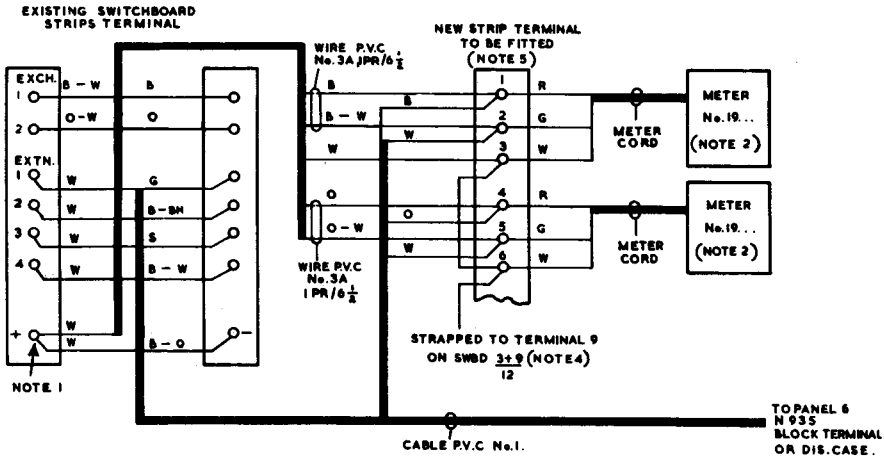


FIG. 3 CABLING FOR SWBD  $\frac{2+4}{6}$  AND  $\frac{3+9}{12}$  (NOTE 4)

NOTES

1. The position of the + (earth) terminal is typical and may be different on earlier types of boards.
2. Meter to be fitted as required.
3. Each Exchange Line to be fitted with a meter is wired in a similar manner.
4. Cabling arrangements shown in Fig. 3 are for Switchboard CB 935  $\frac{2+4}{6}$ . For Switchboard  $\frac{3+9}{12}$  wire in a similar manner using wire P.V.C. No. 3A, 1 pair 6 1/2 Green, Green-White between terminals 7 & 8 on the new Terminal Strip and the third Exchange Line terminals and terminate the third Exchange Line on terminals 7 & 8 of new Terminal Strip.
5. Part No 2/SST/64 for Switchboard  $\frac{1+3}{4}$   
 Part No 4/SST/64 for Switchboard  $\frac{2+4}{6}$   
 Part No 3/SST/64 for Switchboard  $\frac{3+9}{12}$
6. For complete details of modification to Switchboard see Works Spec. S594
7. Diagram N1010 gives details of the various metering schemes.