



NOTES:-

1. TELEPHONE INSTRUMENTS SHOULD BE WIRED TO THE BLOCK TERMINAL AS IN Q 361.
2. THE POWER UNIT SHOULD BE SITED IF POSSIBLE CENTRALLY WITHIN THE SYSTEM.
3. THE MAXIMUM LINE LENGTH BETWEEN EXTREME STATIONS IS 600 YARDS FOR 5 AND 15 BUTTON INSTRUMENTS. THIS WILL BE REDUCED TO 300 YARDS IF ANY ONE OR MORE STATIONS HAS AN EXTENSION CALL FITTED. THE 10 BUTTON INSTRUMENT IS LIMITED TO A MAXIMUM LINE LENGTH OF 500 YARDS, OR 200 YARDS IF EXTENSION CALLERS ARE USED. THIS CAN BE INCREASED TO 600 AND 300 YARDS RESPECTIVELY BY RUNNING AN ADDITIONAL 2 WIRE CABLE FOR POWER.


EXTENSION BELLS OR BUZZERS SHALL EITHER BE BELLS No. 56A OR BUZZERS No. 20 B. THE STRAPS IN EACH SHOULD BE ARRANGED TO CONNECT THE COILS IN SERIES. THE BELLS OR BUZZERS ARE CONNECTED TO BLOCK TERMINALS Nos. 2 AND 5 USING 2 WIRE CABLE.

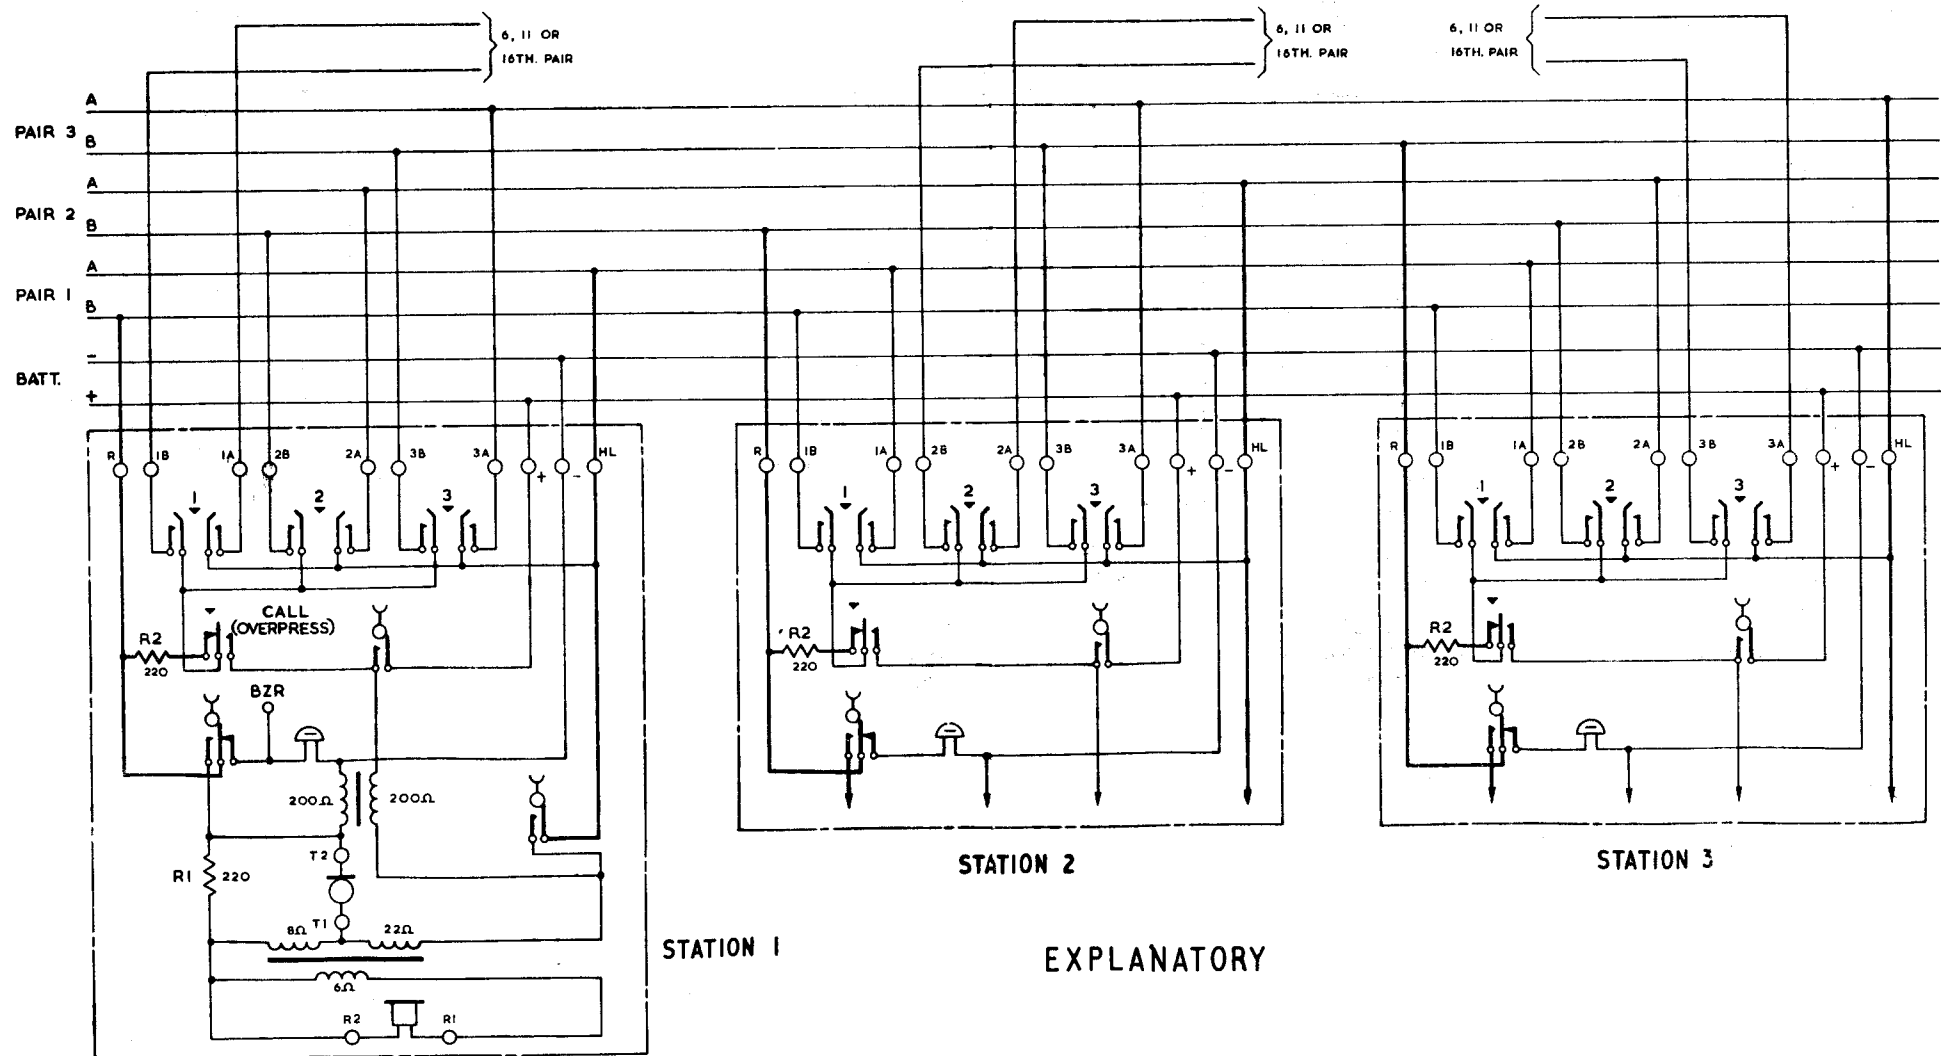

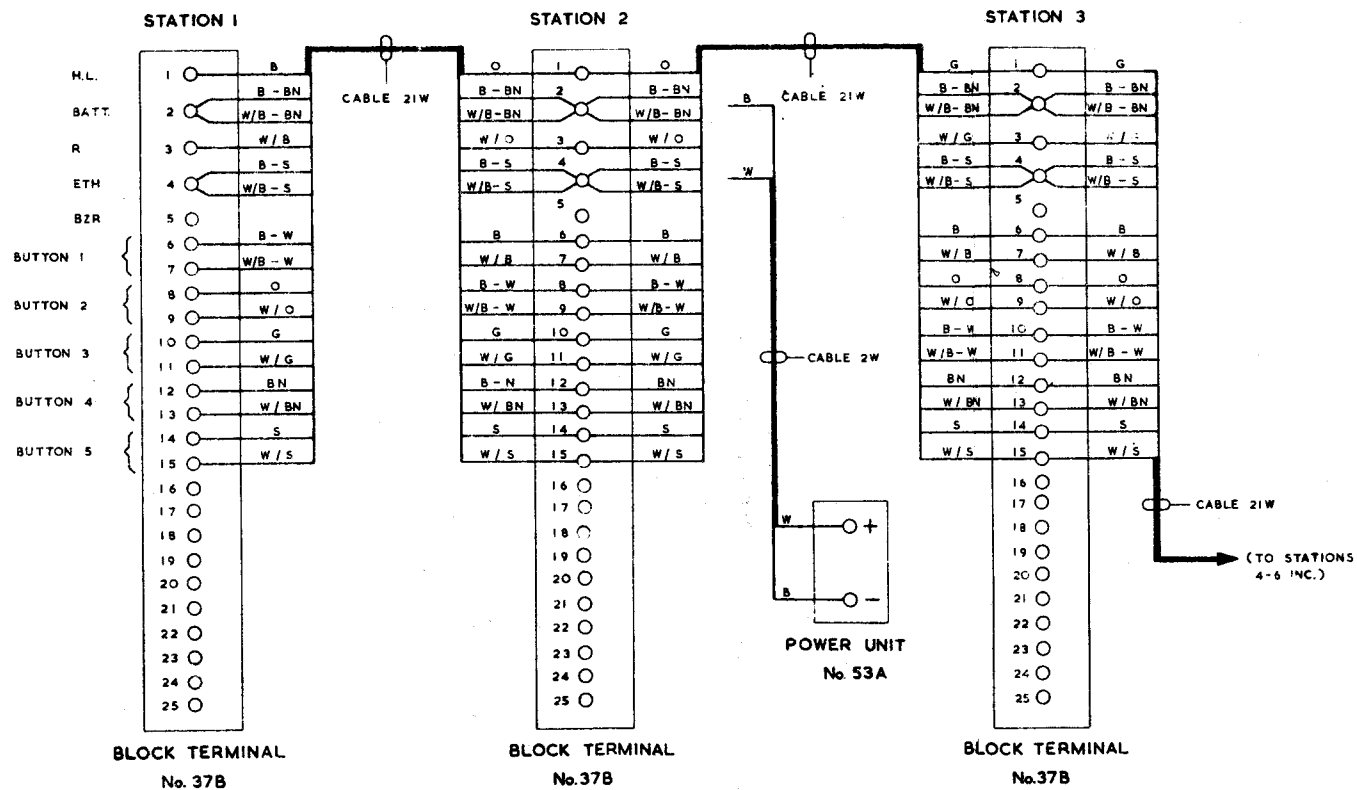

CABLING FOR
STATIONS 4-6


B.T. No.	STATION No.		
	4	5	6
1	BN	S	B-W
2	B-BN	B-BN	B-BN
3	W/B-BN	W/B-BN	W/B-BN
4	W-BN	W/S	W/B-W
5	B-S	B-S	B-S
6	W/B-S	W/B-S	W/B-S
7	B	B	B
8	W/B	W/B	W/B
9	O	O	O
10	W/O	W/O	W/O
11	G	G	G
12	W/G	W/G	W/G
13	B-W	BN	BN
14	W/B-W	W/BN	W/BN
15	S	B-W	S
16	W/S	W/B-W	W/S

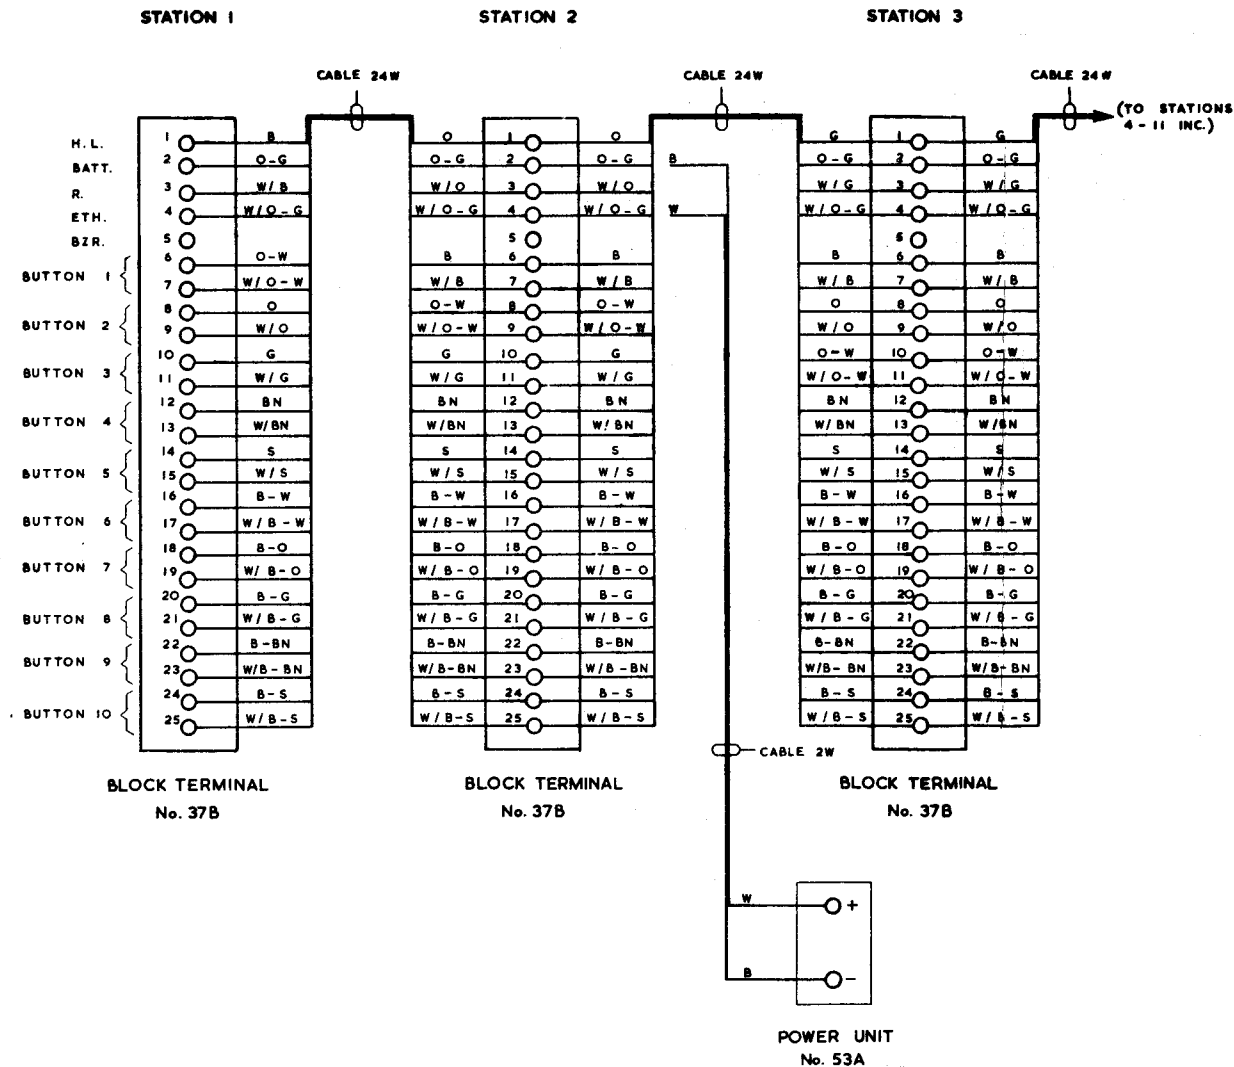

CABLING FOR STATIONS 4-11

B.T. No.	STATION No.									B.T. No.
	4	5	6	7	8	9	10	11		
1	BN	S	B-W	B-O	B-G	B-BN	B-S	O-W	1	
2	O-G	O-G	O-G	O-G	O-G	O-G	O-G	O-G	2	
3	W/BN	W/S	W/B-W	W/B-O	W/B-G	W/B-BN	W/B-S	W/O-W	3	
4	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	4	
5									5	
6	B	B	B	B	B	B	B	B	6	
7	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	7	
8	O	O	O	O	O	O	O	O	8	
9	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	9	
10	G	G	G	G	G	G	G	G	10	
11	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	11	
12	O-W	BN	BN	BN	BN	BN	BN	BN	12	
13	W/O-W	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	13	
14	S	O-W	S	S	S	S	S	S	14	
15	W/S	W/O-W	W/S	W/S	W/S	W/S	W/S	W/S	15	
16	B-W	B-W	O-W	B-W	B-W	B-W	B-W	B-W	16	
17	W/B-W	W/B-W	W/O-W	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	17	
18	B-O	B-O	B-O	O-W	B-O	B-O	B-O	B-O	18	
19	W/B-O	W/B-O	W/B-O	W/O-W	W/B-O	W/B-O	W/B-O	W/B-O	19	
20	B-G	B-G	B-G	B-G	O-W	B-G	B-G	B-G	20	
21	W/B-G	W/B-G	W/B-G	W/B-G	W/O-W	W/B-G	W/B-G	W/B-G	21	
22	B-BN	B-BN	B-BN	B-BN	B-BN	O-W	B-BN	B-BN	22	
23	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/O-W	W/B-BN	W/B-BN	23	
24	B-S	B-S	B-S	B-S	B-S	B-S	O-W	B-S	24	
25	W/B-S	W/B-S	W/B-S	W/B-S	W/B-S	W/B-S	W/O-W	W/B-S	25	

CABLING, FOR TELEPHONES, HOUSE No. 504 AND 505.

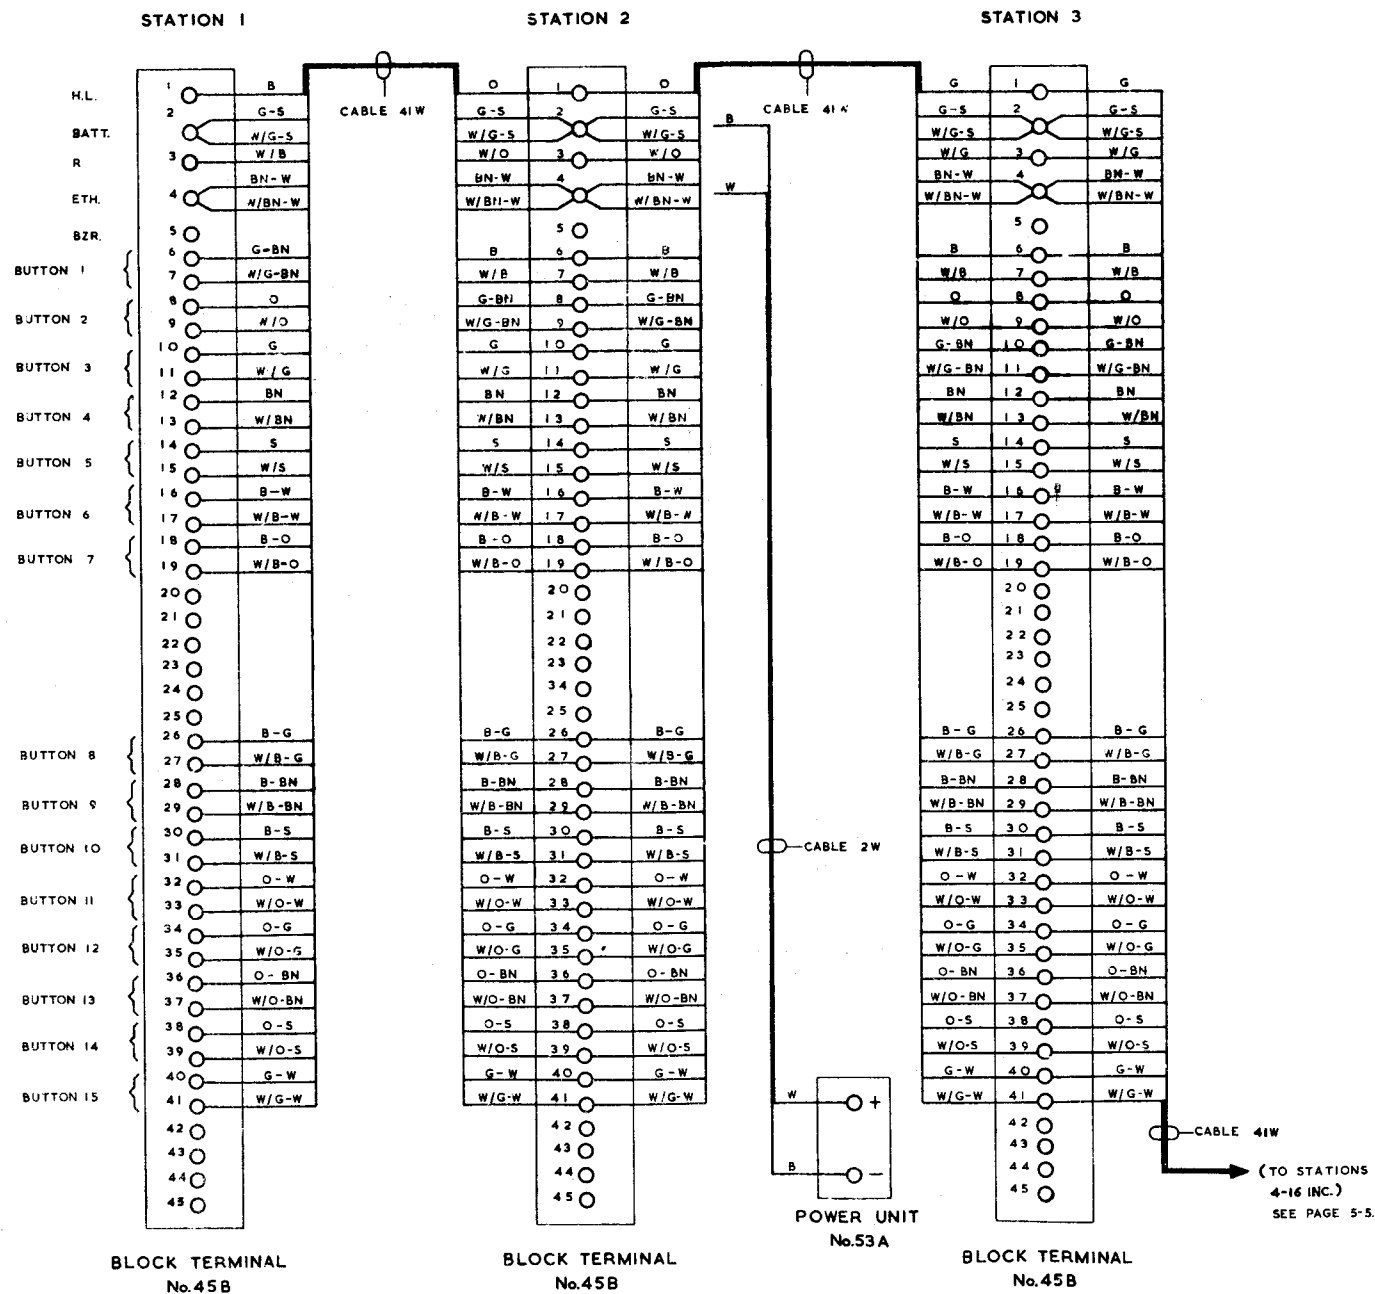

CABLING FOR TELEPHONES, HOUSE No. 504 AND 505.

CABLING FOR STATIONS 4 - 16

Q 362
PAGE 5-5
ISSUE A

B. T. No.	STATION No.														B. T. No.
	4	5	6	7	8	9	10	11	12	13	14	15	16		
1	BN	S	B-W	B-O	B-G	B-BN	B-S	O-W	O-G	O-BN	O-S	G-W	G-BN	1	
2	G-S	G-S	G-S	G-S	G-S	G-S	G-S	G-S	G-S	G-S	G-S	G-S	G-S	2	
	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S	W/G-S		
3	W/BN	W/S	W/B-W	W/B-O	W/B-G	W/B-BN	W/B-S	W/O-W	W/O-G	W/O-BN	W/O-S	W/G-W	W/G-BN	3	
4	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	BN-W	4	
	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W	W/BN-W		
5														5	
6	B	B	B	B	B	B	B	B	B	B	B	B	B	6	
7	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	W/B	7	
8	O	O	O	O	O	O	O	O	O	O	O	O	O	8	
9	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	W/O	9	
10	G	G	G	G	G	G	G	G	G	G	G	G	G	10	
11	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	W/G	11	
12	G-BN	BN	BN	BN	BN	BN	BN	BN	BN	BN	BN	BN	BN	12	
13	W/G-BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	W/BN	13	
14	S	G-BN	S	S	S	S	S	S	S	S	S	S	S	14	
15	W/S	WG-BN	W/S	W/S	W/S	W/S	W/S	W/S	W/S	W/S	W/S	W/S	W/S	15	
16	B-W	B-W	G-BN	B-W	B-W	B-W	B-W	B-W	B-W	B-W	B-W	B-W	B-W	16	
17	W/B-W	W/B-W	W/G-BN	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	W/B-W	17	
18	B-O	B-O	B-O	G-BN	B-O	B-O	B-O	B-O	B-O	B-O	B-O	B-O	B-O	18	
19	W/B-O	W/B-O	W/B-O	W/G-BN	W/B-O	W/B-O	W/B-O	W/B-O	W/B-O	W/B-O	W/B-O	W/B-O	W/B-O	19	
20														20	
21														21	
22														22	
23														23	
24														24	
25														25	
26	B-G	B-G	B-G	B-G	G-BN	B-G	B-G	B-G	B-G	B-G	B-G	B-G	B-G	26	
27	W/B-G	W/B-G	W/B-G	W/B-G	W/G-BN	W/B-G	W/B-G	W/B-G	W/B-G	W/B-G	W/B-G	W/B-G	W/B-G	27	
28	B-BN	B-BN	B-BN	B-BN	B-BN	G-BN	B-BN	B-BN	B-BN	B-BN	B-BN	B-BN	B-BN	28	
29	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/G-BN	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/B-BN	W/B-BN	29	
30	B-S	B-S	B-S	B-S	B-S	B-S	G-BN	B-S	B-S	B-S	B-S	B-S	B-S	30	
31	W/B-S	W/B-S	W/B-S	W/B-S	W/B-S	W/B-S	W/G-BN	W/B-S	W/B-S	W/B-S	W/B-S	W/B-S	W/B-S	31	
32	O-W	O-W	O-W	O-W	O-W	O-W	O-W	G-BN	O-W	O-W	O-W	O-W	O-W	32	
33	W/O-W	W/O-W	W/O-W	W/O-W	W/O-W	W/O-W	W/O-W	W/G-BN	W/O-W	W/O-W	W/O-W	W/O-W	W/O-W	33	
34	O-G	O-G	O-G	O-G	O-G	O-G	O-G	O-G	G-BN	O-G	O-G	O-G	O-G	34	
35	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/O-G	W/G-BN	W/O-G	W/O-G	W/O-G	W/O-G	35	
36	O-BN	O-BN	O-BN	O-BN	O-BN	O-BN	O-BN	O-BN	O-BN	G-BN	O-BN	O-BN	O-BN	36	
37	W/O-BN	W/O-BN	W/O-BN	W/O-BN	W/O-BN	W/O-BN	W/O-BN	W/O-BN	W/O-BN	W/G-BN	W/O-BN	W/O-BN	W/O-BN	37	
38	O-S	O-S	O-S	O-S	O-S	O-S	O-S	O-S	O-S	O-S	G-BN	O-S	O-S	38	
39	W/O-S	W/O-S	W/O-S	W/O-S	W/O-S	W/O-S	W/O-S	W/O-S	W/O-S	W/O-S	W/G-BN	W/O-S	W/O-S	39	
40	G-W	G-W	G-W	G-W	G-W	G-W	G-W	G-W	G-W	G-W	G-W	G-BN	G-W	40	
41	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-W	W/G-BN	W/G-W	41	

P.O.
TELECOMMS
HQRS.

PAPER:-W
CIRCLTN:-
GENERAL

ISSUE

A

PAGE 1, RESISTOR R2 ADDED.

21.2.69.

T D I.4.3. SECTION

16.5.68.