


SWITCHBOARD TG 990.
FOR TARIFF A RENTERS OFFICE WITH
ONE MAIN AND ONE EXTENSION TELEPRINTER.

TG(L)990 C. 8-11-35

D.C.B. CDL. AMS. J.A.S.M.

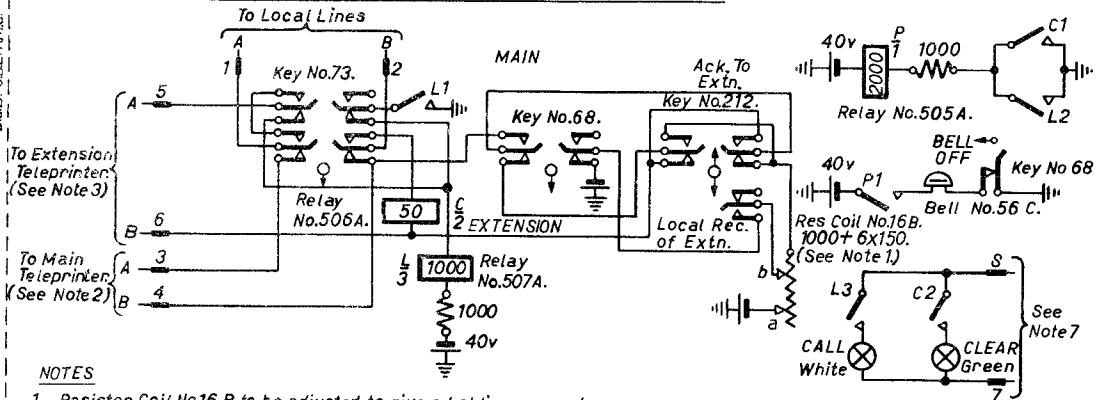

NOTES

- 1 Resistor, Coil No.16 B, to be adjusted to give a holding current of not more than 20 mA. at the Main Teleprinter, by means of tap "a" and to give not less than 30 mAs. on Ext B Line, with key operated to 'Ack to Extn' position, by means of tap "b"
- 2 A Resistance equal to that of the Extension A Line, if greater than 50Ω, to be inserted at the Main Teleprinter between the "S" and "E" Terminals of Unit, Aux. Apps. No.79. in place of existing strap.
- 3 For clearing and acknowledgement arrangements at Extension Teleprinter see TG(L)1052, Figs 1 and 4.
- 4 For Connections at Renters Office see TG(L) 800.
- 5 Keys Nos.73 and 68 are coupled.
- 6 All Battery connections to be wired to Tag 9. All Earth connections to be wired to Tag 10.
- 7 Where D.C. power supply is available, Tags 7 and 8 should be strapped to Tags 9 and 10 respectively, and Lamps No.2, 40v. should be used. Where power is derived from Rectified A.C. Supply by means of Rectifier No.27A, Tags 7 and 8 should be connected to the 50 v.A.C. output of the Rectifier, and Lamps No.2, 50 v. should be used.
- 8 The key spring sets operate in the opposite direction to the key handles, to which the engraving refers.

L3 & C3 were to Clear Call Lamps, respectively	3-7-36	
Redrawn, Cct. revised, LL.No. 1493, B.1001	15-12-36	C
amendment		